

Product End-of-Life Instructions

Product Range: GP4600 Series

Marketing Model/Name: (List of multiple models if applicable)

PFXGP4603TAD*, PFXGP4601TMD*, PFXGP4601TMA*, PFXGP4601TADR*, PFXGP4601TAD*
PFXGP4601TAA*, PFXGP4503TAD*, PFXGP4502WADW*, PFXGP4501TMD*, PFXGP4501TMA*
PFXGP4501TAD*, PFXGP4501TAA*, PFXGP4301TAD*

Purpose:

The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.




H x L x D in mm: W315 x H241 x D56 mm

Weight in g : 2,462g

Operations recommended for the end of life treatment

There are several steps to process the products at the end of life so as to recover components, materials or energy :Reuse → Separation for special treatment → Other dismantling → Shredding.

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

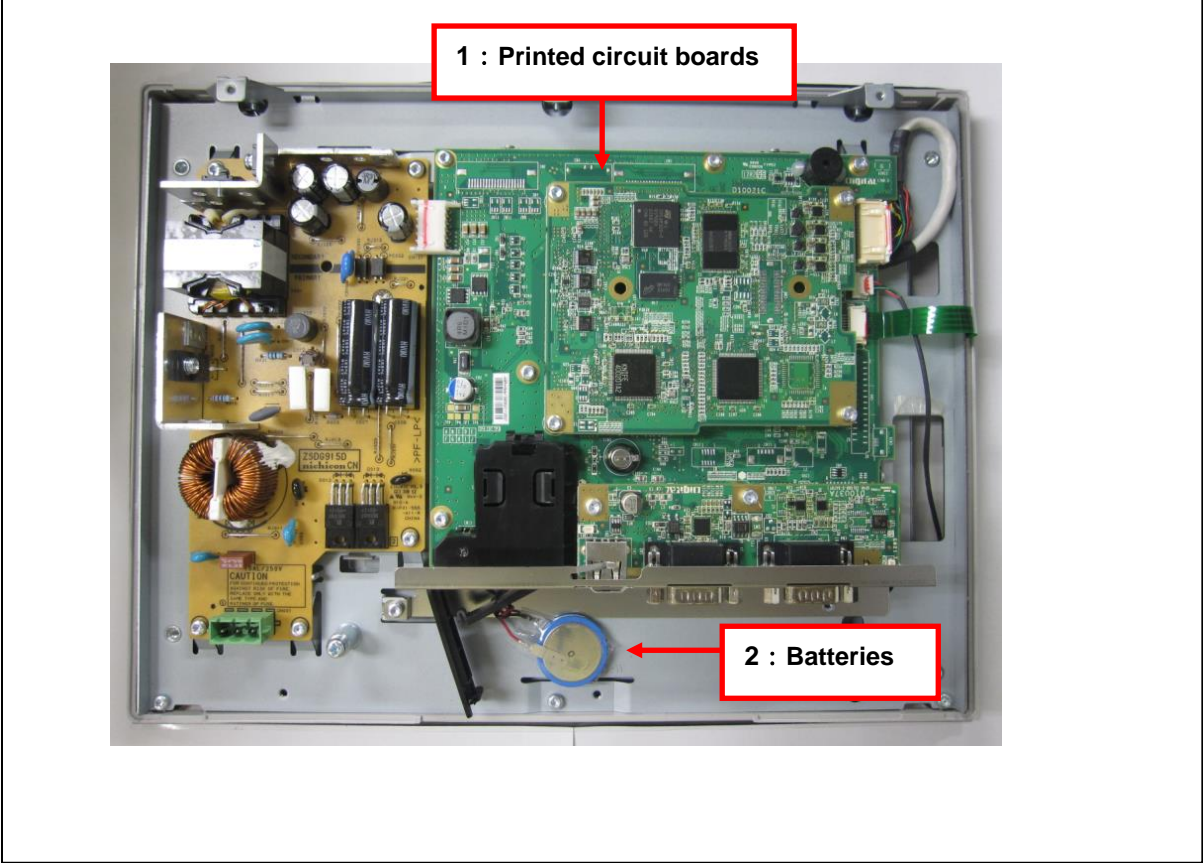

Recommendation	Number on drawing	Components	Weight (g)	Comment
Special treatment (Components listed for depollution)	1	Printed circuit boards	139	
	2	Batteries	7.6	

Schneider Electric Japan Holdings Ltd.
 2-15-6, Shibaura, Minato-ku,
 Tokyo,
 Japan

ENVEOLI120709EN

Publication date : 2018-12-07