



ET6000 Series  
**Better Visualization  
and More Information**

ET6000 시리즈는 HMI의 충분한 기능을 제공하면서도 경제적인 제품입니다. 기존 사용하던 하드웨어 및 소프트웨어와의 호환성을 통해서 간편히 신제품으로 변경이 가능합니다.



Entry HMI ET6000 Series


[proface.com](http://proface.com)

**Pro-face**<sup>TM</sup>  
by Schneider Electric

# New Pro-face Entry HMI ET6000 Series, leveraging HMI Centric Concept


## 다양한 장비들과 간편 연결

풍부한 인터페이스와 다양한 프로토콜.

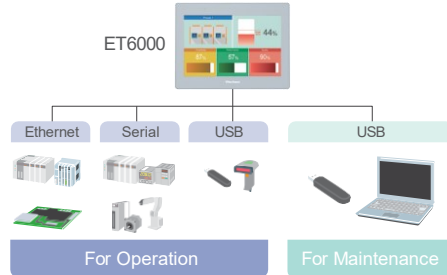

## 고해상도 & 1600만 컬러

고해상도와 1600만 컬러 디스플레이

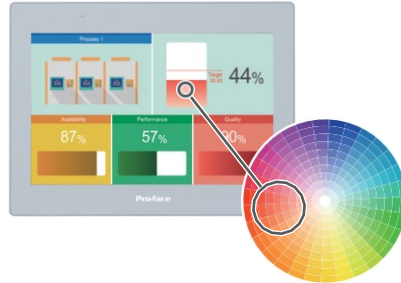

## 동급 최고의 시각화

멋진 화면을 만들기 위해 더 많은 이미지를 저장할 수 있는 충분한 메모리 크기.



## 원활한 작동

15" 와이드 및 12" 와이드로 모든 정보를 한 눈에 볼 수 있어 장비 작동이 더 쉬워집니다..



## 사이버 보안 강화

기본적인 의도적 공격에 대해 CPU 수준에서 보안 검사를 수행



## 다양한 산업 환경에서 사용

높은 습도와 먼지에 대응하기 위한 부분 코팅



Model No	PFXET6400WAD	PFXET6500WAD	PFXET6600WAD	PFXET6700WAD
Display	7.0" Wide (800 x 480)	10.1" Wide (1,024 x 600)	12.1" Wide (1,280 x 800)	15.6" Wide (1,366 x 768)
Touch Panel	16 million colors White LED 16 level brightness control			
Interface	Type : resistive film (analog) / Single touch / Service life : 1,000,000 times or more			
Memory	COM1 : RS-232C, COM2 : RS-422 / 485, Ethernet : IEEE802.3i / IEEE802.3u, 10BASE-T / 100BASE-TX x 1, USB : Type A x 1, micro-B x 1		Application memory : 64MB Backup memory : 128KB	
Certifications	IP65, CE, UL, KC			IP65, Type 4X, CE, UL, KC
Ambient air temperature	0...50 °C (32...122 °F)			
Dust	0.1 mg/m <sup>3</sup> (10 <sup>-7</sup> oz/ft <sup>3</sup> ) or less (non-conductive levels)			
Pollution degree	For use in Pollution Degree 2 environment			
Atmospheric pressure (operating altitude)	800 to 1,114 hPa (2,000 m [6,561 ft.] )			
Vibration resistance	IEC/EN 61131-2 compliant / 5...9 Hz Single amplitude 3.5 mm (0.14 in) / 9...150 Hz Fixed acceleration : 9.8 m/s <sup>2</sup> / X, Y, Z directions for 10 cycles (approximately 100 minutes)			
Cooling method	Natural air circulation			
External dimensions (W x H x D)	205.5 x 150.5 x 45 mm (8.09 x 5.92 x 1.77 in)	270.5 x 200.5 x 47 mm (10.65 x 7.89 x 1.85 in)	310.5 x 232.5 x 50 mm (12.22 x 9.15 x 1.97 in)	412 x 268 x 50 mm (16.22 x 10.55 x 1.97 in)
Panel cut dimension (W x H)	190 x 135 mm (7.48 x 5.31 in)	255 x 185 mm (10.04 x 7.28 in)	295 x 217 mm (11.61 x 8.54 in)	394 x 250 mm (15.51 x 9.84 in)
Weight	0.61 kg (1.34 lb) or less	0.99 kg (2.18 lb) or less	1.62 kg (3.57 lb) or less	2.52 kg (5.56 lb) or less

proface.com

Visit ET6000 web site for more information!

<https://www.proface.com/en/product/hmi/et6000/top>

슈나이더 일렉트릭 코리아(주)

1588-2630

<https://www.proface.com/en/contact>

©2021 Schneider Electric Japan Holdings Ltd. All Rights Reserved.

