

1600 Industrial Rack Mount PCs with Pentium 4 (Includes 1612, 1613, & 1614)



With heavy-duty steel construction, Xycom Automation's 1600 industrial rack mount PCs are available in a range of systems that are tough enough for plant floor use. The 1600's bring maximum flexibility, serviceability, and reliability, along with powerful features and rugged packaging, to the factory floor.

Higher Performance

The Xycom 1600 Industrial PC's offer a 2.4 GHz Pentium 4 processor with 512 KB cache and running at 533 MHz system bus. With DDR SDRAM options up to 1 GB, the most demanding applications will have adequate memory.

Flexible Architecture

You can configure and reconfigure Xycom Automation's industrial PC's for nearly any application through a wide variety of standard technologies. Our industrial PCs make it easy for end users and vendors to use cost-effective industry-standard components, storage options, and ISA/PCI expansion for application specific requirements. Storage options include CD-ROM, writable CD-ROM, ZIP, tape, removable hard and floppy drives. Available expansion up to 7 PCI & 3 ISA cards. See table on page 3 for summary of available lengths.

Network and Device Connectivity

The 1600's built-in dual 10/100 BaseT Ethernet ports make it easy to connect to enterprise-wide networks as well as I/O systems. The dual USB ports, one RS-232, and one selectable RS-232/422/485 port make connection of peripheral devices quick and easy without additional cards.

Multimedia Performance

The onboard 4X AGP Video Controller with 8 MB base and up to 64 MB system RAM allows high resolution with full color and 3-D operation. The onboard Audio ports (In, Out, Mic) allows easy connection of speakers and microphones if needed.

Power Supply Options


1600 systems can be configured with a standard 300 Watt A/C or dual redundant 300 Watt A/C.

FEATURES

- Rack mount 4U height and 3 sizes for various length expansion capabilities
- 14-slot passive backplane with up to 7 PCI & 3 ISA available expansion slots
- Intel Socket 478 2.4 GHz Pentium 4, 512 KB cache, 533 MHz system bus
- 4X AGP Video controller with 8 MB base and uses system RAM up to 64 MB
- Up to 1 GB DDR SDRAM
- USB (x2)
- Parallel Port
- One RS-232 port and one selectable RS-232/422/485 port
- Audio (In, Out, Mic)
- Dual 10/100 BaseT Ethernet ports
- 300 Watt AC power supply and Optional Dual Redundant Power Supply
- Lockable front door panel for preventing unwanted access
- PS/2 keyboard and mouse ports behind front door
- Three 5.25" front accessible drive bays
- Internal hard drive up to 40 GB
- Power-on switch and reset switch behind lockable front door, also includes HDD LED indicator
- 82 CFM cooling fan that dissipates heat in the chassis and easy-to-clean air filters in front door to prevent internal components from excessive dust
- Hold-down clamp for protecting add-on cards against vibration
- Preloaded Windows 2000, NT, XP, or No operating system




PRODUCT MOUNTING AND DIMENSIONS

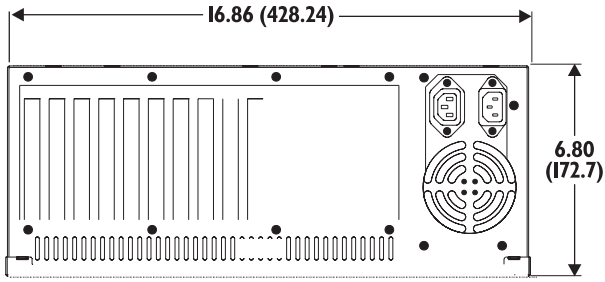


Rear


| | A | B | C | D | E | F | G |
|------|-------------------|-------------------|---------------------|------------------|-------------------|--------------------|--------------------|
| 1612 | 17.75 (450.85) | 19.25 (488.95) | 17.875 (454.025) | 3.75 (95.25) | 7.37 (187.198) | 10.99 (279.146) | 14.61 (371.094) |
| 1613 | 19.75 (501.65) | 21.25 (539.75) | 19.875 (504.825) | 4.50 (114.30) | 8.12 (206.25) | 11.74 (298.20) | 15.36 (390.14) |
| 1614 | 22.75 (577.85) | 24.25 (615.95) | 22.875 (581.03) | 4.50 (114.30) | 8.12 (206.25) | 11.74 (298.20) | 15.36 (390.14) |

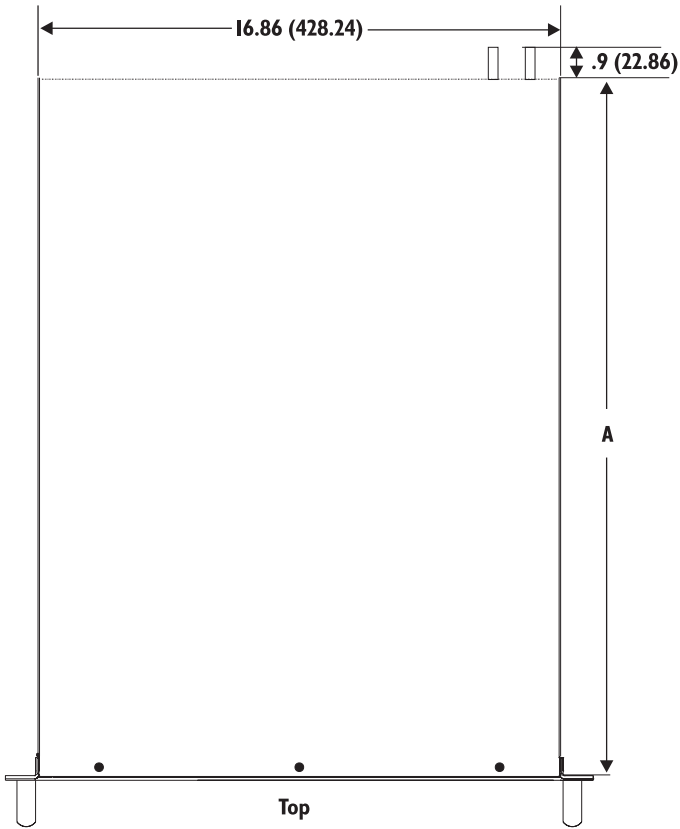


Top

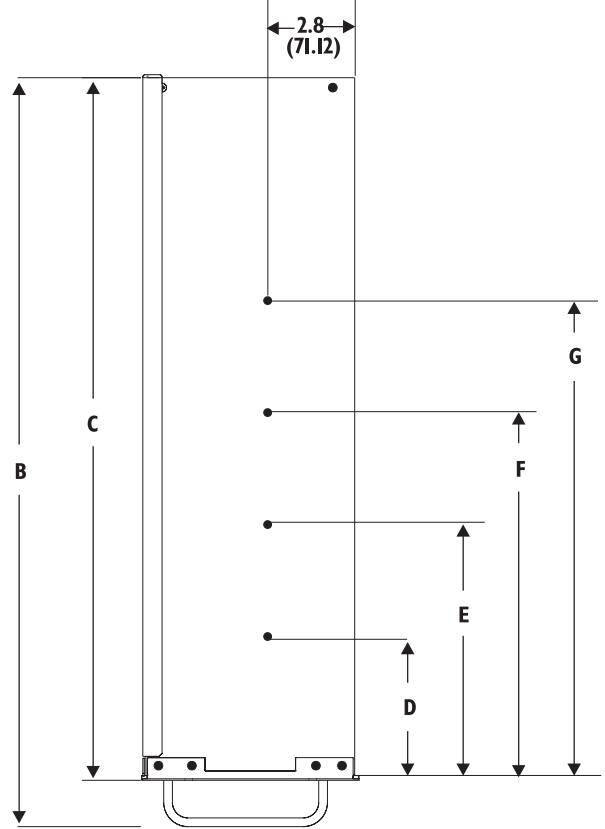

Side

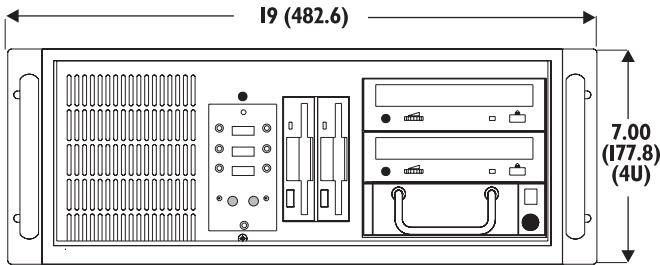

Front

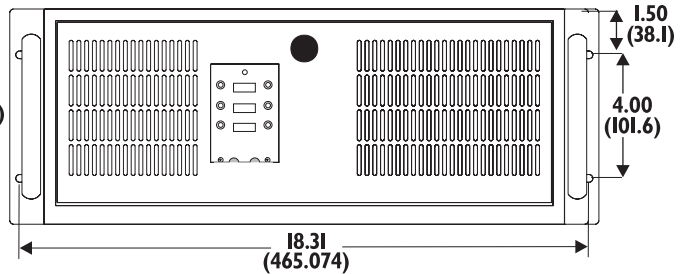

Front with door closed

All dimensions are in inches (mm).

Optional slide rail and wall or shelf mounting kits available. See page 4.

PRODUCT SPECIFICATIONS AND RATINGS

Environmental

| | Operating | Nonoperating |
|------------------------|--|--|
| Thermal | 0°C to 50°C | -20°C to 60°C |
| Humidity | 20% to 80% RH, noncondensing | 5% to 90% RH, noncondensing |
| Shock ^a | 2g peak acceleration, 11 msec duration | 7.5g peak acceleration, 11 msec duration |
| Vibration 5-2000 Hz | .5g acceleration | .081" peak to peak displacement 2g maximum acceleration |
| Altitude ^b | Sea level to 15,000 ft. | Sea level to 50,000 ft. |

^a Mounted by the flange only (not rail mounted).

^b Consistent with internal component specifications.

Cooling fan capacity^c

82 CFM with dust filters

^c Does not include power supply fans

Electrical

| | | |
|--------------|---|---|
| Power Supply | 300 W AC | 2 x 300 W AC Redundant |
| Rated input | 100-240 V AC, autoranging, 50-60 Hz, 4/2A (maximum), 150 W nominal ^d | 100-240 V AC, autoranging, 50-60 Hz, 4/2A (maximum), 150 W nominal ^d |

^d Nominal Power is measured for a base configuration only. Any additional expansion and/or devices will increase the input power required.

Unit Weight

48.2 lbs (23 kg)

Regulatory Compliance

CE

- EN 55022
- EN 50082-2
- IEC 60950-1

FCC

- 47 CFR, Part 15, Class A

Safety Agency Approvals



UL

- UL 1950

cUL

- CSA-C22.2, #950^e

^e Not available with DVD-R/W option.

Available Expansion


| Model | Available ISA Expansion Slots | | | Available PCI Expansion Slots | | | Total Available Slots |
|-------|-------------------------------|------------|------------|-------------------------------|------------|------------|-----------------------|
| | Full-length | 3/4-length | 1/2 length | Full-length | 3/4-length | 1/2 length | |
| 1612 | 3 | 0 | 0 | 1 | 2 | 4 | 10 |
| 1613 | 3 | 0 | 0 | 1 | 6 | 0 | 10 |
| 1614 | 3 | 0 | 0 | 4 | 3 | 0 | 10 |

ORDERING INFORMATION

To create an order number, follow the conventions defined by the example order numbers and product configurations.

Example Order Number

| Order Number | Description |
|----------------------------|--|
| 1612-2400-256-7P-2K | A 1612, 1613, or 1614 series industrial rack mount PC with 2.4 GHz Intel Socket |
| 1613-2400-256-7P-2K | 478 Pentium 4, 512 KB cache, 533 MHz system bus processor, 256 MB DDR SDRAM, |
| 1614-2400-256-7P-2K | Internal 20 GB hard drive, preloaded with Windows 2000 and 4X AGP video controller |

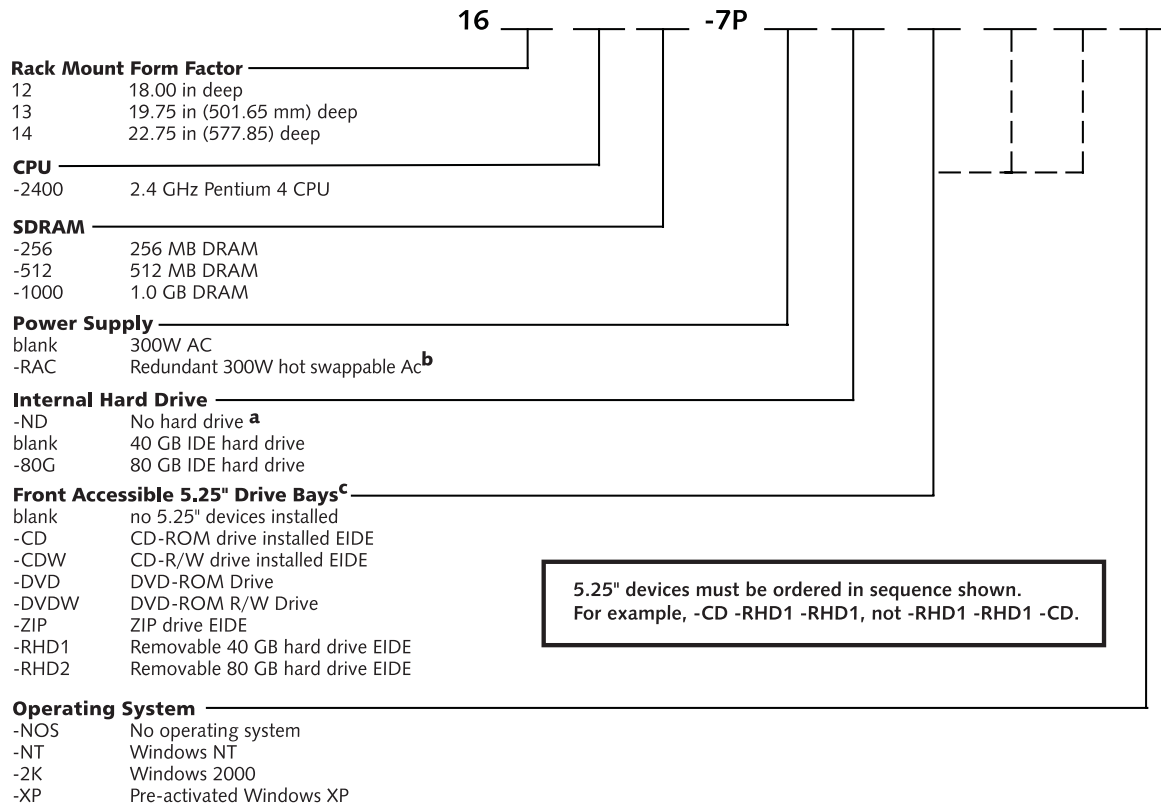

5.25" devices must be ordered in sequence shown.
For example, -CD -RHD1 -RHD1, not -RHD1 -RHD1 -CD.

^aMust select at least one EIDE hard drive (-RHD1 or -RHD2). ^bOnly available on 1613 & 1614
^cWhen ordering 5.25" drive bay devices and no operating system, all required drivers will not be loaded and devices will not function properly.

Important Notice for XP configurations: Certain Microsoft® software product(s) included with this computer may use technological measures for copy protection. IN SUCH EVENT, YOU WILL NOT BE ABLE TO USE THE PRODUCT IF YOU DO NOT FULLY COMPLY WITH THE PRODUCT ACTIVATION PROCEDURES. Product activation procedures and Microsoft's privacy policy will be detailed during initial launch of the product, or upon certain reinstallations of the software product(s) or reconfigurations of this computer, or may be completed by Internet or telephone (toll charges may apply).

Accessories

| Order Number | Description |
|-----------------|---|
| 1600-RMS | Rack mount slide rail kit. Sold separately |
| 1600-WMB | Wall or shelf mount bracket. Sold separately. |

The I 600 Industrial PC carries a two-year warranty on parts and labor. Extended warranties are available.

Xycom Automation, Inc.
Phone: 734-429-4971 Fax: 734-429-1010
<http://www.xycom.com>

Customer Support Hotline:
734-944-0482





California Proposition 65 Warning—Lead and Lead Compounds

Advertencia de la Proposición 65 de California—Plomo y compuestos de plomo

Avertissement concernant la Proposition 65 de Californie—Plomb et composés de plomb

⚠ WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov.

⚠ ADVERTENCIA: Este producto puede exponerle a químicos incluyendo plomo y compuestos de plomo, que es (son) conocido(s) por el Estado de California como causante(s) de cáncer y defectos de nacimiento u otros daños reproductivos. Para mayor información, visite : www.P65Warnings.ca.gov.

⚠ AVERTISSEMENT: Ce produit peut vous exposer à des agents chimiques, y compris plomb et composés de plomb, identifiés par l'État de Californie comme pouvant causer le cancer et des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter: www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca