

5015T/R2 Industrial Flat Panel Touch Monitor

DS-300005(D)



FEATURES

- 2-year warranty
- State of the art 15" TFT XGA color LCD supporting resolutions up to 1024 x 768 @ 75Hz, 265K colors
- Sophisticated scaling engine produces excellent full screen images in all common VESA modes automatically
- Analog resistive touch screen and driver software standard (USB or Serial connections available - only one cable can be used at a time)
- Analog View (VGA) and Digital Video Input (DVI)
- Mounts in 5015T or XT1502 cutouts with included mounting spacers
- Shallow mounting depth - only 2.85" deep
- Powder coated aluminum front bezel (stainless steel front bezel optional)
- Provision for 75mm VESA arm mounting on back of monitor
- Simple installation using mounting clips - no studs
- 24V DC input power option
- Up to 50' cables (10' USB and Serial touch screen cables included)
- NEMA 4/4X/12 front panel
- UL, cUL & CE
- UL listed for Hazardous Locations: Class I, Division 2, Groups A, B, C, D; Class II, Division 2, Groups F and G; Temp. Code: T6

Pro-face/Xycom's 5015T/R2 15" industrial flat panel touch monitor offers state-of-the-art performance and features at a very competitive price.

Superb Display Quality

The 5015T/R2 delivers superb display quality up to 1024 x 768 (XGA) resolution with a color depth of 265K colors.

The latest generation scaling capability assures high quality, full-sized images for all standard VESA modes up to XGA @ 75Hz.

Precision Manufacturing for Harsh Environments

The 5015T/R2 is constructed using an aluminum front bezel providing trouble

free service in hostile NEMA 4/4X/12 environments. An optional stainless steel front bezel is now available. The 5015T/R2 now offers a 24V DC input power option.

Fits Your Needs

Other features include Hazardous Location - UL Class 1 Division 2, Class 2 Division 2 compliance, an integrated analog resistive touch screen and special mounting clips for quick and easy installation.

All units are shipped with ten foot USB and serial touch screen cables and drivers. Only one cable can be used at a time.

Cutout Compatibility


The 5015T/R2 mounts easily in previous 5015T and XT1502 monitors cutouts with the included mounting spacers. Requires no change in existing panel cutout.

DISPLAY SPECIFICATIONS

5015T/R2

Display Size (Active Area H x V)	11.97" (304.1 mm) x 8.98" (228.1 mm)
Resolution (1 pixel = R+G+B dots)	XGA: 1024 x 768
Display Colors	265K
Brightness	350 Nit Typical
Contrast Ratio	400:1 Typical
Horizontal Viewing Angle	120°
Vertical Viewing Angle	100°
Backlight Life	50,000 Hours

PRODUCT AND MOUNTING DIMENSIONS

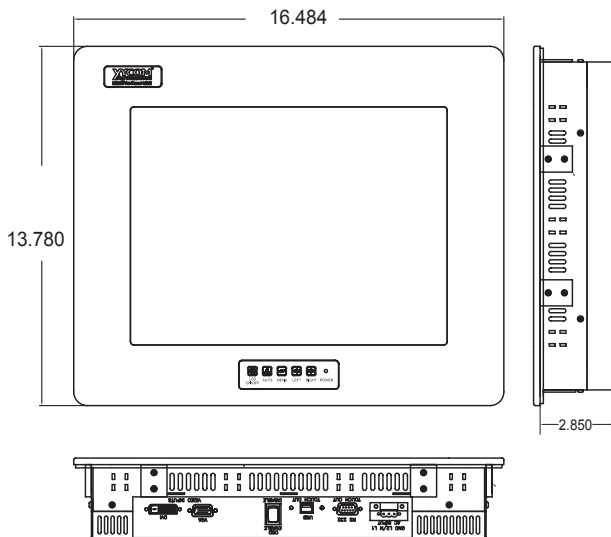


5015T/R2 Unit Dimensions

Width	16.485" (418.7 mm)
Height	13.78" (350 mm)
Mounting Depth	2.85" (72.3 mm)
Weight	15 lbs (7.0 kg)

PRODUCT CUTOUT DIMENSIONS


5015T/R2 Cutout Dimensions

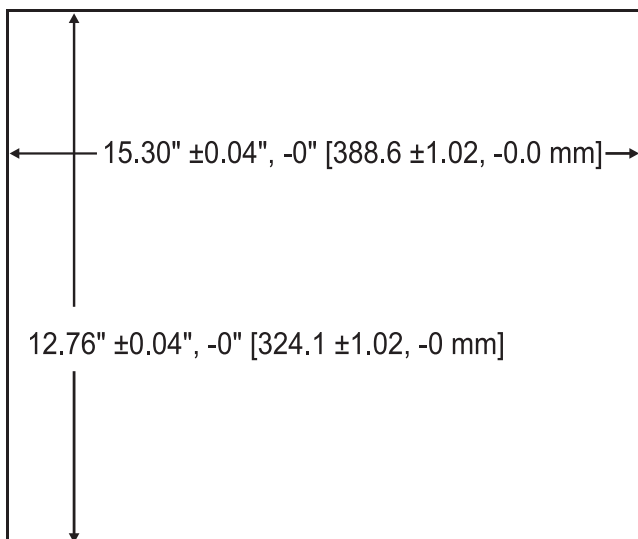

Temperature Specifications

When installing your 5015T/R2 into an enclosure, extra care should be exercised to ensure that the ambient air around the unit (inside your enclosure, not outside the enclosure) does not exceed 50°C. Exceeding 50°C may cause premature degeneration of the unit.


Even though the 5015T/R2 is a very compact unit, care still needs to be exercised when installing the 5015T/R2 into an undersized enclosure. Consult your enclosure manufacturer for proper sizing and/or cooling options. The product specifications and ratings section of this datasheet contains the information your enclosure manufacturer will require.



PRODUCT AND MOUNTING DIMENSIONS (continued)

5015T/R2 Mounting with Spacers

The 5015T/R2 will mount directly in previous 5015T version and XT1502 cutouts with included mounting spacers. See diagrams below.

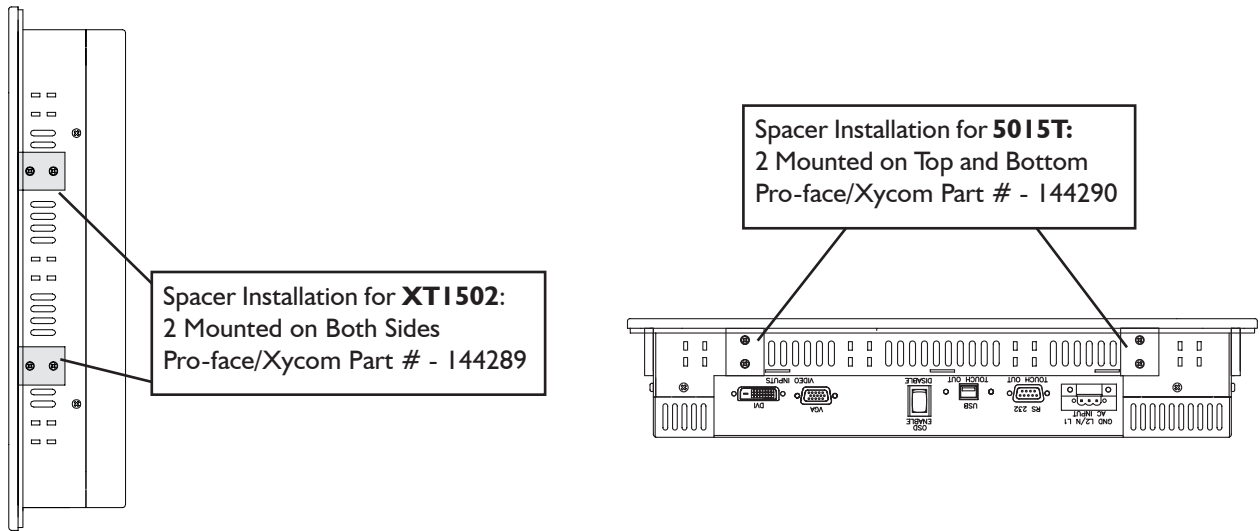

PRODUCT SPECIFICATIONS AND RATINGS

Environmental

	Operating	Nonoperating
Thermal	0°C to 50°C	-20°C to 60°C
Humidity	20% to 80% RH, noncondensing	20% to 80% RH, noncondensing
Shock	15g peak acceleration, 11 msec duration	30g peak acceleration, 11 msec duration
Vibration 5-2000 Hz	.006" peak to peak displacement 1.0g maximum acceleration	.015" peak to peak displacement 2.5g maximum acceleration
Altitude^a	Sea level to 10,000 ft.	Sea level to 40,000 ft.

^a Consistent with internal component specifications.

Electrical

AC power	100 - 240V AC, 0.6A maximum, 50/60 Hz, 27 W nominal*
DC Power	18V DC - 30V DC @ 1.4A maximum, 26 W nominal*, inrush current - 22 A max @24 V DC

* Nominal Power is measured for a base configuration only. Any additional expansion and/or devices will increase the input power required.

Front Panel

- NEMA 4/4X/12 and IP65

Regulatory Compliance

CE

- EN 55022: Class A
- EN 61000-6-2
- EN 60950-1
- EN 61000-3-2, Class A
- EN 61000-3-3

FCC

- 47 CFR, Part 15, Class A

Safety Agency Approvals:

- UL 508 Listed
- UL 1604 Listed*
- cUL CSA C22.2, #142 Listed
- cUL CSA C22.2, #213 Listed*

* Class I, Division 2, Groups A, B, C, D;
Class II, Division 2, Groups F and G;
Temp. Code: T6

ORDERING INFORMATION

To create an order number, follow the conventions defined by the example order numbers and product configurations.

Example Order Number

Order Number	Description
5015T/R2	15-inch NEMA 4/4X/12 industrial flat panel TFT XGA (1024 x 768) color monitor with resistive touchscreen. Includes AC Power Supply, 10 ft. USB and Serial touch screen cables*, mounting hardware, documentation and touchscreen drivers

5015T/R2-	
Power Supply	_____
blank	AC Power Supply
-24V	24V DC Power Supply
Bezel	_____
blank	Powder-coated Aluminum Bezel
-S	303 Stainless Steel Bezel ^a

* Only one cable can be used at a time.

^a Screen adjustment buttons will be mounted on rear with Stainless Steel Bezel option.

Cables (ordered separately)

Order Number	Description
3000-CBL-10V	10 ft. (3 m) coaxial VGA cable [male-male]; connects monitor to standard VGA card
3000-CBL-25V	25 ft. (7.5 m) coaxial VGA cable [male-male]; connects monitor to standard VGA card
3000-CBL-50V	50 ft. (15 m) coaxial VGA cable [male-male]; connects monitor to standard VGA card
CBL-SER10MF	10 ft. (3 m) serial communication cable
CBL-SER25MF	25 ft. (7.5 m) serial communication cable
CBL-SER50MF	50 ft. (15 m) serial communication cable
3000-USB-03AB	3 ft. (1 m) USB Touch Cable
3000-USB-10AB	10 ft. (3 m) USB Touch Cable

Adapter Plates for 5015T/R2 Monitors

Order Number	Description
MTG-RM5015T/R2	Adapter panel for mounting 5015T/R2 (NOT 5015T) in 19" rack. Panel measures 14.00" (8U) in height.
MTG-RM5015	Adapter panel for mounting 5015T (NOT 5015T/R2) in 19" rack. Panel measures 14.00" (8U) in height.
MTG-PM5015-3015	Adapter plate for panel mounting a 5015T or 5015T/R2 in place of a 3015. Requires a minimum of 15.4" of vertical panel space
MTG-PM5015-9407	Adapter plate for panel mounting a 5015T or 5015T/R2 in place of a 9407. Requires a minimum of 15.4" of vertical panel space

Pro-face America

Phone: 734-429-4971

Fax: 734-429-1010

<http://www.profaceamerica.com>

Customer Support Hotline: 734.944.0482

For more information

ACCESS

www.profaceamerica.com

Pro-face

© 2007 Pro-face America. Specifications may change without notice.

Xycom is a trademark of Xycom Automation, LLC. Other brand or product names are the property of their respective owners.



California Proposition 65 Warning—Lead and Lead Compounds

Advertencia de la Proposición 65 de California—Plomo y compuestos de plomo

Avertissement concernant la Proposition 65 de Californie—Plomb et composés de plomb

⚠️ WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov.

⚠️ ADVERTENCIA: Este producto puede exponerle a químicos incluyendo plomo y compuestos de plomo, que es (son) conocido(s) por el Estado de California como causante(s) de cáncer y defectos de nacimiento u otros daños reproductivos. Para mayor información, visite : www.P65Warnings.ca.gov.

⚠️ AVERTISSEMENT: Ce produit peut vous exposer à des agents chimiques, y compris plomb et composés de plomb, identifiés par l'État de Californie comme pouvant causer le cancer et des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter: www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca