



9403 CRT-Based Industrial Monitors



Xycom Automation's 9403 CRT-based industrial monitors with NEMA 4/4X/12 sealed front panels meet the rigorous requirements of the plant floor with a high resolution color display in a ruggedized housing. The 9403 includes a built-in, programmable keyboard interface module, which can be redefined for use with any software package. The optional resistive membrane touchscreen, which allows you to select on-screen objects by pressing directly on the touchscreen, can be factory installed.

FEATURES

- 14" SVGA color CRT display (800 x 600)
- Optional analog resistive touchscreen
- Impact-resistant display shield
- NEMA 4/4X/12 front panel
- Programmable keypad keycodes
- Relegendable keypads with 20 function keys and 32 data entry keys
- Front panel access for external PC keyboards

BENEFITS

Sharp, Easy-to-Read Displays


A bright 14" SVGA screen can display complex operations with clarity. An optional Windows-compatible resistive touchscreen, which provides a flexible, easy-to-use interface for operator input, can be factory installed. Drivers for MS-DOS and Windows 3.1 are shipped with touchscreen-equipped units. Contact the factory for Windows 95 and Windows NT drivers.

Meets High Standards

To survive on the plant floor, our industrial PC products meet NEMA 4/4X/12, FCC, UL, and European CE mark requirements. Xycom Automation also leads the industry in reliability, service, and support with an optional five-year warranty unmatched in the industry.

PRODUCT DIMENSIONS

9403 Mounting

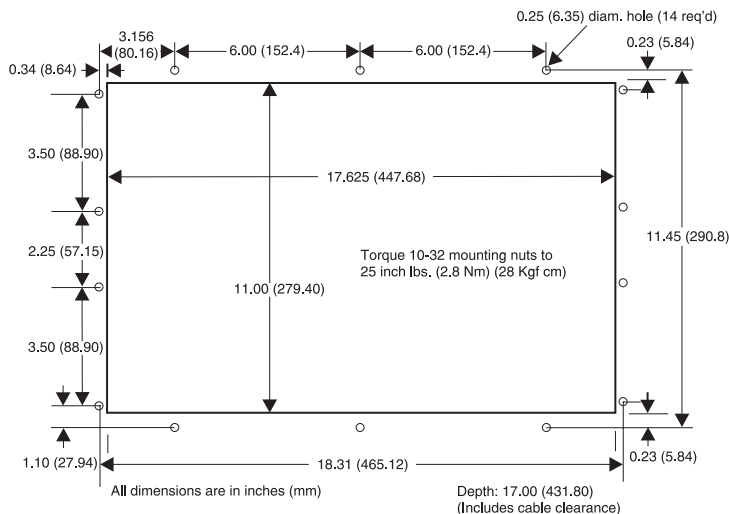

9403 Unit Dimensions

Model	9403
Height	12.2" (310 mm)
Width	19.0" (483 mm)
Depth	17.0" (432 mm)
Weight	40 lbs. (18.1 kg)

PRODUCT SPECIFICATIONS AND RATINGS

Environmental

	Operating	Nonoperating
Thermal	0C to 50C	-40C to 60C
Humidity	20% to 80% RH, noncondensing	20% to 80% RH, noncondensing
Shock	15g peak acceleration, 11 msec duration	30g peak acceleration, 11 msec duration
Vibration 5-2000 Hz	.006" peak to peak displacement 1.0g maximum acceleration	.015" peak to peak displacement 2.5g maximum acceleration
Altitude	Sea level to 10,000 ft.	Sea level to 40,000 ft.

Electrical

AC power 115/230 VAC, autosensing, +14%/-21%, 50-60 Hz, 3.3/1.65A

Regulatory Compliance

CE

- EN 55022, Class A
- EN 50082-2: 1995
- EN 60950

FCC

- 47 CFR, Part 15, Class A

Safety Agency Approvals

UL

- UL 1950

CUL

- C22.2, #950

ORDERING INFORMATION

Standard Configurations

Order Number	Description
9403	14" NEMA 4/4X/12 industrial color monitor with 32 data entry keys and 20 function keys.
9403T	14" NEMA 4/4X/12 industrial color monitor with sealed resistive touchscreen, 32 data entry keys, and 20 function keys.

Xycom Automation, Inc.
734-429-4971 • Fax: 734-429-1010
<http://www.xycomautomation.com>

Canada Sales: 905-607-3400
Northern Europe Sales: +44-1604-790-767
Southern Europe Sales: +39-011-770-53-11





California Proposition 65 Warning—Lead and Lead Compounds

Advertencia de la Proposición 65 de California—Plomo y compuestos de plomo

Avertissement concernant la Proposition 65 de Californie—Plomb et composés de plomb

⚠ WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov.

⚠ ADVERTENCIA: Este producto puede exponerle a químicos incluyendo plomo y compuestos de plomo, que es (son) conocido(s) por el Estado de California como causante(s) de cáncer y defectos de nacimiento u otros daños reproductivos. Para mayor información, visite : www.P65Warnings.ca.gov.

⚠ AVERTISSEMENT: Ce produit peut vous exposer à des agents chimiques, y compris plomb et composés de plomb, identifiés par l'État de Californie comme pouvant causer le cancer et des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter: www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca