

# 5.7" Advanced HMI with Control - AGP3300-CA1M with Built-in CANopen Master



**Features:**

- Supports up to 63 CANopen Devices, including Pro-face EXM I/O to the built-in CANopen Master Controller
- Crisp, clear and bright, 320 x 240 resolution Monochrome or STN Color LCD Display
- 64-bit RISC 133Mhz CPU for ultra fast screen refresh and data sampling and Logic execution
- No Grid Analog Touch Panel for improved visibility and precise part placement
- Supports up to two protocol drivers (Serial or Ethernet) simultaneously
- 100 Base-T Ethernet, USB, Serial (MPI) and CompactFlash® Communication Interfaces
- Remote connections supported using Pro-Server EX, Web Server, FTP Server and GP-Viewer EX

**Performance Specifications**

Model	AGP3300-L1-D24-CA1M	AGP3300-S1-D24-CA1M	AGP3300-T1-D24-CA1M
Display	Type	5.7" Monochrome LCD	5.7" STN Color LCD
	Colors	Black and White (16 shades)	4096 colors
	Backlight	CCFL (service life: 50,000 hrs. at 25°C and 24hr. operation)	
	Resolution	320 x 240 pixels (QVGA)	
	Brightness Adjustment	8 levels of adjustment available via touch panel	
	Contrast Adjustment	8 levels of adjustment available via touch pane	not applicable
	Touch Panel	Resistive Film (Analog) 1024 x 1024	
Memory	Application	6MB Flash EPROM	
	Data Backup	320KB SRAM (with lithium backup battery)	
Interfaces	Serial (COM1) Interface	RS-232C/422/485, 9 pin D-sub plug, Speed: 2400 to 115.2 kbps	
	Serial (COM2) Interface	RS-422/485, 9 pin D-sub socket, Speed: 2400 to 115.2 kbps & 187.5Kbps (MPI)	
	Ethernet Interface	Ethernet IEEE802.3, 10BASE-T / 100BASE-TX, RJ45	
	USB Interface	1 port USB 1.1 (Host), Type A	
	CF Card Interface	1x CompactFlash Card Slot (Type-II)	
	Controller Interface	Built in CANopen (DS301) Master controller connects to up to 63 CANopen Slave devices. Speed: 50kbps - 1Mbps. Up to 512 each Discrete Input/Output, Up to 128 each Analog/Integer Input/Output. Connect to Pro-face EXM I/O or 3rd party CANopen Slave Devices. Supported Message Types: PDO (252 RPDO, 252 TPDO), SDO, NMT, SYNC, EMT	


**General Specifications**

Model	AGP3300-L1-D24-CA1M, AGP3300-S1-D24-CA1M, AGP3300-T1-D24-CA1M	
Electrical	Input Voltage	24V DC
	Rated Voltage	19.2V DC to 28.8V DC
	Power Consumption	26W or less
Environmental	Ambient Operating Temp.	0°C (32°F) to 50°C (122°F)
	Storage Temperature	-20°C (-4°F) to 60°C (140°F)
	Humidity	10%RH to 90%RH (non-condensing, wet bulb temperature: 39°C (102°F) or less)
	Altitude Operation	800hPa to 1114hPA (2000 meters above sea level or lower)
	Vibration & Shock Resistance	IEC/EN61131-2 compliant 5 to 9 Hz single-amplitude 3.5 mm [0.14 in.] 9 to 150 Hz constant-accelerated velocity 9.8 m/s² X,Y,Z directions for 10 cycle (100 minute)
Structural	Ratings	Equivalent to IP65f, Nema #250 Type 4x/13
	Certifications	UL/c-UL Listed, CSA (UL508, UL1604 Class 1, Div 2, CSA-C22.2 No.142), CE EN55011 Class A, EN6100-6-2, RoHS
	External Dimensions	W 167.5mm [6.59in] X H 135mm [5.31in] X D 59.5mm [2.34in]
	Weight	1.2kg [2.6lb]
	Warranty	Two year standard

### Communication Capability

#### Simultaneous Multi-Protocol Support:

Up to four different protocols can be active at one time.

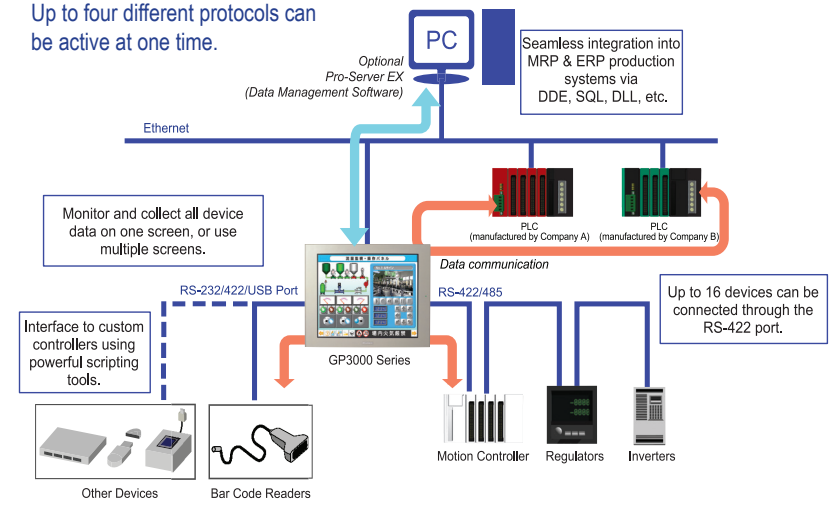

### Ordering Information

Part Number	Description
AGP3300-L1-D24-CA1M	5.7" Mono, 2 Serial, 1 USB, Ethernet, CANopen Master, 24VDC
AGP3300-S1-D24-CA1M	5.7" STN, 2 Serial, 1 USB, Ethernet, CANopen
AGP3300-T1-D24-CA1M	5.7" TFT, 2 Serial, 1 USB, Ethernet, CANopen Master, 24V

### Optional Items

Part Number	Product Name
HTB1C0DM9LP	CANopen Slave Module for up to 7 EXM Modules (with built in 12pt Input / 6pt Output)
EXM-DDI8DT	Ex Module (8 Points Input)
EXM-DDI16DT	Ex Module (16 Points Input)
EXM-DRA8RT	Ex Module (8 Points Relay Output)
EXM-DRA16RT	Ex Module (16 Points Relay Output)
EXM-DDO8UT	Ex Module (8 Points Sink Output)
EXM-DDO8TT	Ex Module (8 Points Source Output)
EXM-DDO16UK	Ex Module (16 Points Sink Output)
EXM-DDO16TK	Ex Module (16 Points Source Output)
EXM-DMM8DRT	Ex Module (4 Points Input/4 Points Relay Out)
EXM-AMI2HT	Ex Module (2ch Analog Input)
EXM-ALM3LT	Ex Module (2ch Temp. Input/1ch Analog Out)
EXM-AMM3HT	Ex Module (2ch Analog Input/1ch Analog Out)
EXM-AMO1HT	Ex Module (1ch Analog Output)
CA3-DFS6-01	5.7" Touch Screen Protection Sheet (Qty 5) AGP3300/3302 units
EX-ED-Vxx	Screen Editor Software
CA-CABLE-010M	CANopen Cable, No connectors, 10 Meters
CA-CABLE-050M	CANopen Cable, No connectors, 50 Meters
CA-CABLE-100M	CANopen Cable, No connectors, 100 Meters
CA-CN90-TRM	CANopen, 9Pin DSub, 90° with Term. Switch
CA-CN00-TRM	CANopen, 9Pin DSub, 180° with Term. Switch
CA3-USBCB-01	USB Download Cable
HMI-CAB-ETH	Ethernet Crossover Cable
CA3-ATFALL-01	Mounting Fasteners

### Cut-Out Compatibility

#### Over 16 Years of Cut-out Compatibility!

**Panel cut-out dimensions**

Series	Size (mm)
GP77R Series	GP377R Series
GP2000 Series	GP2300/ GP2301 Series
AGP3000 Series	GP-3300 Series

AGP3000 model "Drop-in"


Cut-out compatible with:  
GP370,  
GP377,  
GP2300,  
GLC2300

### Software Compatibility

Powered by  
Screen Editor  
**GP-Pro EX**

**HMI Development Software**  
(Version 2.20 or newer)

**Caution:** Before operating any of these products, please be sure to read all related manuals thoroughly.  
- product names used in this document are trademarks or registered trademarks of their respective companies.  
- information contained in this document is subject to change without notice.



**Pro-face America**  
Phone: 734.477.0600  
Fax: 734.864.7347  
www.profaceamerica.com

**Customer Service Hotline: 800.289.9266**

For more information  
**ACCESS** [www.profaceamerica.com](http://www.profaceamerica.com)

**Pro-face**



## California Proposition 65 Warning—Lead and Lead Compounds

## Advertencia de la Proposición 65 de California—Plomo y compuestos de plomo

## Avertissement concernant la Proposition 65 de Californie—Plomb et composés de plomb

**⚠ WARNING:** This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**⚠ ADVERTENCIA:** Este producto puede exponerle a químicos incluyendo plomo y compuestos de plomo, que es (son) conocido(s) por el Estado de California como causante(s) de cáncer y defectos de nacimiento u otros daños reproductivos. Para mayor información, visite : [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**⚠ AVERTISSEMENT:** Ce produit peut vous exposer à des agents chimiques, y compris plomb et composés de plomb, identifiés par l'État de Californie comme pouvant causer le cancer et des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter: [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

**Schneider Electric USA, Inc.**  
800 Federal Street  
Andover, MA 01810 USA  
888-778-2733  
[www.schneider-electric.us](http://www.schneider-electric.us)

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:  
**Schneider Electric México, S.A. de C.V.**  
Av. Ejercito Nacional No. 904  
Col. Palmas, Polanco 11560 México, D.F.  
55-5804-5000  
[www.schneider-electric.com.mx](http://www.schneider-electric.com.mx)

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

**Schneider Electric Canada, Inc.**  
5985 McLaughlin Road  
Mississauga, ON L5R 1B8 Canada  
800-565-6699  
[www.schneider-electric.ca](http://www.schneider-electric.ca)