

5.7" Multi-Port Operator Interface - AGP3300T



TouchPanel
Operation

5.7-inch TFT Color LCD Operator Interface

AGP-3300T

Models: AGP3300-T1-D24

DC24V

QVGA

5.7-inch

QVGA
(320 x 240)

Analog



Features:

- Graphical Touch Screen
- 65,536 Colors TFT Display
- 320 x 240 Resolution
- Ethernet/Internet Remote Connectivity
- Multi-Language Support
- 10Base-T/100 Base-TX Ethernet, USB, Serial (MPI) and CompactFlash™ Interfaces
- Dual Simultaneous Protocol Support
- GP-Pro EX HMI Development Environment

Performance Specifications

Model	AGP3300-T1-D24
Display Type	TFT Color LCD
Display Colors	65536 Colors (no Blink/16384 Colors (3-speed Blink)
Graphics Display Resolution	(320 x 240 resolution)
Backlight	CCFL, MTBF Value 50,000hrs (TYP) or more at 25°C (77°F) and 24 hrs. operation
Touch Screen	Resistive Film (analog)
USB (Type A)	USB Interface (USB 1.1) Type A connector x1
Serial Interface	COM1 RS-232C, COM2: RS422/485
Optional Communication Modules	Profibus, DeviceNet (optional)
Ethernet Interface	10Base-T/100Base-TX
CF Card	Card Slot Type II
FTP Server	Yes, Remote upload/download Data and Recipes
Web Server Support	Yes, Automatic Alarm Alerts
GP Viewer Support	Yes, Remote Access for Maintenance and Update


General Specifications

Model	AGP3300-T1-D24
Input Voltage	DC24V
Power Consumption	26W or less
Allowable Voltage Drop	Within 5ms
Voltage Endurance	AC1000V 20mA for 1 minute (between charging and FG terminals)
Insulation Resistance	DC500V 10MΩ(min.) (between charging and FG terminals)
Certifications	UL508, UL1604 (Class I and II, Division 2 and Class III Hazardous (classified) locations), c-UL, CE, CSA-C22.2 No.142-M1987, CSA-C22 No. 14-M95, EN55011 Class A, EN61000-6-2, RoHS
Ambient Operating Temperature ²	Operating Temperature 0 to 50°C (unit must be installed within 30° of vertical)
Humidity - Ambient/Storage	10 to 90% RH (Not condensing, wet bulb temperature: 39°C or less).
Corrosive Gas	Free of corrosive gases
Noise Immunity	Noise Voltage: 1000Vp-p, Pulse Duration: 1μs, Rise Time: 1ns (via noise simulator)
Grounding	Grounding resistance of 100Ω 2mm ² or thicker wire, or your country's applicable standard. (same for FG and SG terminals)
Electrostatic Discharge Immunity	6kV (complies with EN 61000-4-2 Level 3)
Vibration Resistance	IEC61131-2 compatible, 5Hz to 9Hz Half Amplitude 3.5mm, 9Hz to 150Hz Constant Acceleration 9.8ms ⁻² , Applied in X, Y and Z directions 10 cycles for 180minutes
Rating	Equivalent to IP65f (NEMA #250 4x/13 (Equivalent to NEMA 12 with the addition of "Oil or Coolant Spraying and Splashing") ⁴
Weight	Approx. 1.0kg [2.2lb]
External Dimensions	167.4mm [6.59in.] W × 135mm [5.31in.] H × 59.5mm [2.34in.] D
Warranty	Two (2) year

² Ambient Operating Temperature indicates the cabinet interior or panel face temperature.

⁴ Meets IP65f testing requirements. Operation is not, however, guaranteed in every environment.

AGP-3300T - External Dimensions

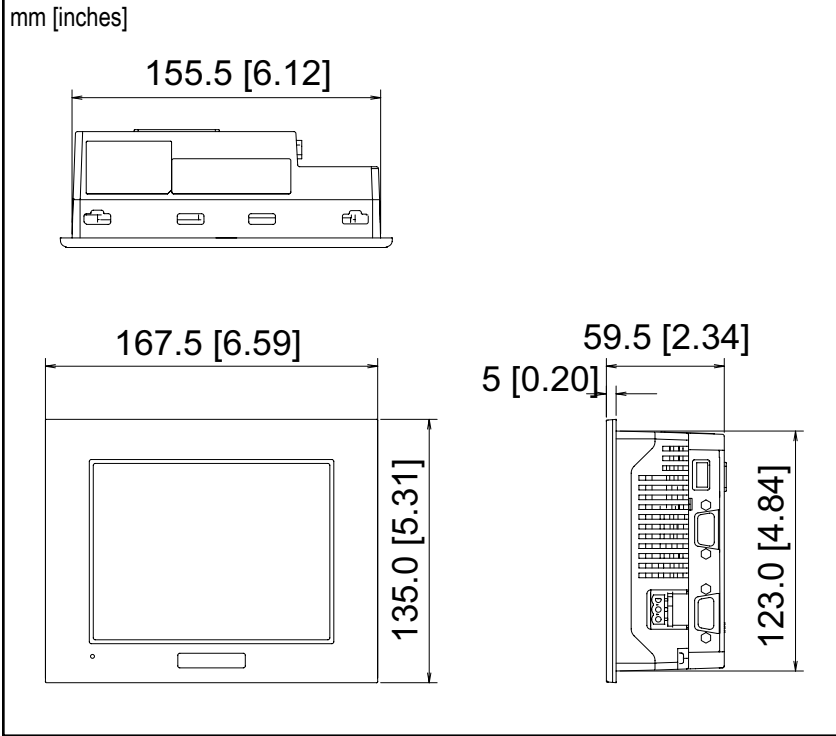

Ordering Information

Part Number	Description
AGP3300-T1-D24	5.7" TFT Color LCD, USB, Ethernet, Serial, CF, DC24V

Accessories or Replacement Components

Product Name	Part Number
Ethernet Crossover Cable	HMI-CAB-ETH
USB Transfer Cable	CA3-USBCB-01 (2m)
Installation Fasteners ¹⁾	CA3-ATFALL-01
GP-Pro EX HMI Development Software	EX-ED-Vxx (latest version)
Screen Protection Sheet (5 sheets/set)	CA3-DFS6-01

- All information contained in this document is subject to change without notice.





POWERED BY:

Screen Editor

GP-Pro EX

HMI Development Software

AGP-3300T - Cut-Out Dimensions

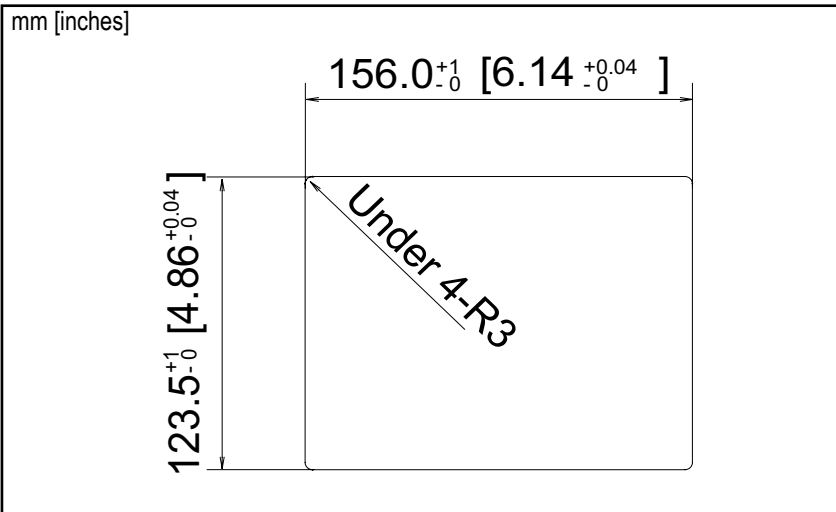

Pro-face America
 Phone: 734.429.4971
 Fax: 734.429.1010
www.profaceamerica.com

Customer Service Hotline: 734.944.0482

For more information
ACCESS www.profaceamerica.com

Pro-face



California Proposition 65 Warning—Lead and Lead Compounds

Advertencia de la Proposición 65 de California—Plomo y compuestos de plomo

Avertissement concernant la Proposition 65 de Californie—Plomb et composés de plomb

⚠ WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov.

⚠ ADVERTENCIA: Este producto puede exponerle a químicos incluyendo plomo y compuestos de plomo, que es (son) conocido(s) por el Estado de California como causante(s) de cáncer y defectos de nacimiento u otros daños reproductivos. Para mayor información, visite : www.P65Warnings.ca.gov.

⚠ AVERTISSEMENT: Ce produit peut vous exposer à des agents chimiques, y compris plomb et composés de plomb, identifiés par l'État de Californie comme pouvant causer le cancer et des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter: www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca