

AGP3400T FN1M HMI with Integrated Controller



Features:

- 65,536 Colors, Clear, Bright, High-Resolution TFT Display
- 64-bit RISC 266Mhz CPU for Ultra-Fast Screen Refresh and Data Sampling
- No Grid Analog Touch Panel for Improved Visibility and Precise Part Placement
- Supports Up to Four Protocol Drivers Simultaneously
- High Speed Application Transfer, 10 Times Faster than Conventional Operator Interfaces
- 10/100 Base-T Ethernet, USB, (MPI) Serial and CompactFlash™ Communication Interfaces
- Includes Audio Output, Alarm/Buzzer Output, External Reset Input
- High-Definition Part Images and Multi-Language Support
- Dual Channel Flex Network Port

Specifications

Model	AGP3400-T1-D24-FN1M
Graphics Display Resolution	640 x 480 pixels
Display Type and Size	TFT Color LCD (7.5 inch)
Display Colors	65,536 Colors
Display Area	153.7mm[6.05in.] x 115.8mm[4.56in.]
Touch Screen	Resistive film analog 1024 x 1024 resolution
USB	1 port USB1.1 Host I/F, USB TYPE-A connector
CF Card	1 slot CompactFlash™, TYPE II
Serial	COM 1: RS-232C/422/485 configurable, 9 pin plug D-sub, Data Transmission Speed: 2400 to 115.2 kbps COM 2: RS-422/485, 9 pin socket D-sub, Data Transmission Speed: 2400 to 115.2 kbps (MPI Direct 187.5 kbps)
Ethernet	Ethernet IEEE802.3, 10BASE-T/100BASE-TX, modular jack connector (RJ-45)
Flex Network Interface	Connect to Flex Network distributed I/O modules: 2 channel, 200m per channel. Speed: 6Mbps, variable Input/Output: 512pts max. Integer Variable Input/Output: 128 pts max.
Backlight	CCFL (Service life: 54,000 hrs. at 25 °C and 24 hr. Operation)
Brightness and Contrast Controls	8 levels of adjustment available via touch panel
Programming Memory	8MB FEPRAM (< Rev 4), 16MB (Rev 4 and up, using GP-Pro EX V2.6 or later)
Data Backup	320kb SRAM with battery backup
AUX Input/Output	AUX Discrete Output: Alarm Output, RUN Output, Buzzer Output, Rated: DC24V @ 50mA AUX Discrete Input: Remote Reset Input, Rated: DC24V @ 6mA Operating Voltage: ON State: DC9V or greater, OFF State: DC2.5V or less
Sound Output	Speaker output 70mW (Rated Load: 8ohm, Frequency: 1kHz)

General Specifications

Input Voltage	DC24V (Rated voltage DC19.2 to 28.8V)
Power Consumption	28W or less
Ambient Operating Temp.	0°C (32°F) to 50°C (122°F)
Storage Temperature	-20°C (-4°F) to 60°C (140°F)
Altitude Endurance	800hPa to 1114hPa (2000 meters or lower)
Certifications	CE, CSA, UL Listed Cl 1 Div 2 Groups A, B, C, D
Humidity - Ambient/Storage	10%RH to 90%RH (non-condensing, wet bulb temperature: 39°C (102°F) or less)
Corrosive Gas	Free of corrosive gasses
Noise Immunity	Noise Voltage: 1000Vp-p Pulse Duration: 1µs Arise Time : 1ns
Cooling Method	Natural air circulation
Electrostatic Discharge Immunity	6kV (complies with EN 61000-4-2 Level 3)
Vibration Resistance	IEC61131-2 compliant. 5Hz to 9Hz single amplitude 3.5mm, 9Hz to 150Hz fixed acceleration 9.8m/s ² , X,Y, Z directions for 10 times (100min.)
Shock during operation	EN/IEC 60068-2-2 compliant, 147m/Sec, 11msec (Approx. 15G), 3 shocks to 3 direction/ axis
Rating	Equivalent to IP65f, Nema #250 Type 4x/13 (Equivalent to NEMA 12 with the addition of "Oil or Coolant Spraying and Splashing")
Weight	1.8kg (4.0lb) or less
External Dimensions	W215mm[8.46in.] x H170mm [6.69in.] x D60mm [2.36in.]
Warranty	Two-year standard (maximum 4 years)

Online Logic Programming Monitoring Feature




Detect Problems Faster

- View logic Programming on HMI while running.
"No need for a laptop!"
- Verify current values of all variables live
- Quickly identify sequential logic faults
- Helps optimize Programming & Processes
- View logic in English or Japanese

Powerful Logic Programming

With GP-Pro EX, you can develop logic programs as well as screen creation. You can also import existing logic programs created with the GP-PRO/PBIII C-Package.

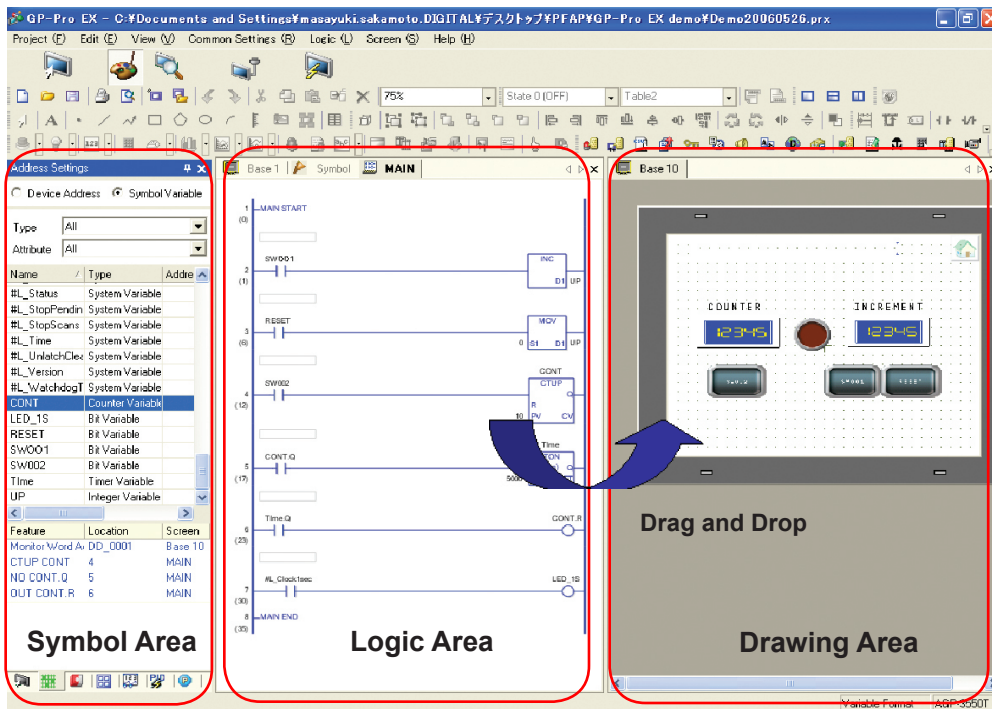

Time Saving Steps

Drag and Drop

Drag contact or coil to quickly create a graphical switch or lamp.

Re-usable sub-routines

Reduce steps for product programming development and maintenance using sub-routines.


Screen Editor
GP-Pro EX

Distributed I/O Modules

Features include: timers, counters, logical operations, mathematical, bit operation, etc. Mix and match any combination of analog and digital I/O modules.

63 Stations Max

- 256 Input Points Max
- 256 Output Points Max
- 64 Integer Inputs Max
- 64 Integer Outputs Max

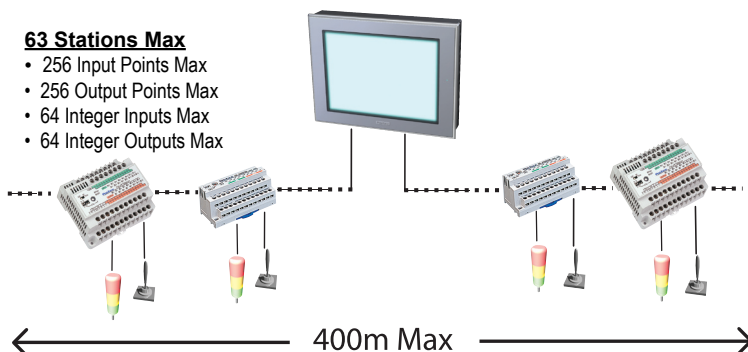


Flex Network Modules

Monitor & Control

- For distributed I/O applications.
- Supports the Flex Network Analog and Discrete I/O Modules.




AGP3400T - External Dimensions

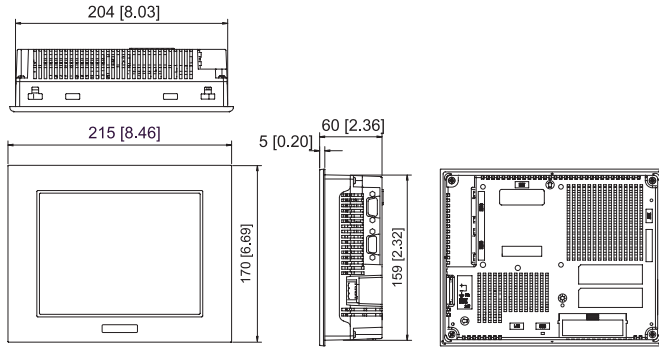

AGP-3400T(DC type) unit shown.

AGP3400T - Cut-Out Dimensions and Compatibility

Unit: mm [in.]

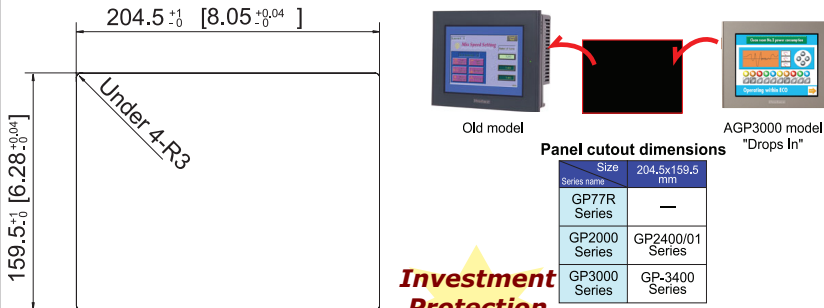

Investment Protection

Ordering Information

Part Number	Description
AGP3400-T1-D24-FN1M	7.5" TFT, 2 Serial, 1 USB, Ethernet, Flex Network, 24VDC


Optional Items

Part Number	Product Name
HMI-CAB-ETH	Ethernet Crossover Cable: HMI to PLC Ethernet port or to program HMI
CA3-USBCB-01	USB download cable, PC USB port to AGP USB port
PS400-DF00	Screen Protection Sheet (5 sheets/set)
FN-X32TS41	32 point Discrete Input (CE/UL/cUL)
FN-XY16SK41	16 point Discrete Input, 16 point Sink Transistor Output (CE/UL/cUL)
FN-XY16SC41	16 point Discrete Input, 16 point Source Transistor Output (CE/UL/cUL)
FN-XY32SKS41	32 point Discrete Input, 32 point Sink Transistor Output (CE/UL/cUL)
FN-AD02AH41	2-Channel Analog Input: 0-10VDC 0-20ma, 4-20ma (CE/UL/cUL)
FN-AD04AH11	4-Channel Analog Input: 0-10VDC, +/-10VDC, 0-20ma, 4-20ma
FN-DA02AH41	2-Channel Analog Output: 0-10VDC 0-20ma, 4-20ma (CE/UL/cUL)
FN-DA04AH11	4-Channel Analog Output 0-10VDC, +/-10VDC, 0-20ma, 4-20ma
FN-CABLE-2010-31-MS	FlexNetwork Cable, 10 Meters
FN-CABLE-2050-31-MS	FlexNetwork Cable, 50 Meters
FN-CABLE-2200-31-MS	FlexNetwork Cable, 200 Meters
PLC Cables & Accessories	See AGP3000 Connectivity Document

Caution: Before operating any of these products, please be sure to read all related manuals thoroughly.
 - All product names used in this document are trademarks or registered trademarks of their respective companies.
 - All information contained in this document is subject to change without notice.

Simultaneous Multi-Protocol Support

Up to four different protocols can be active at one time.

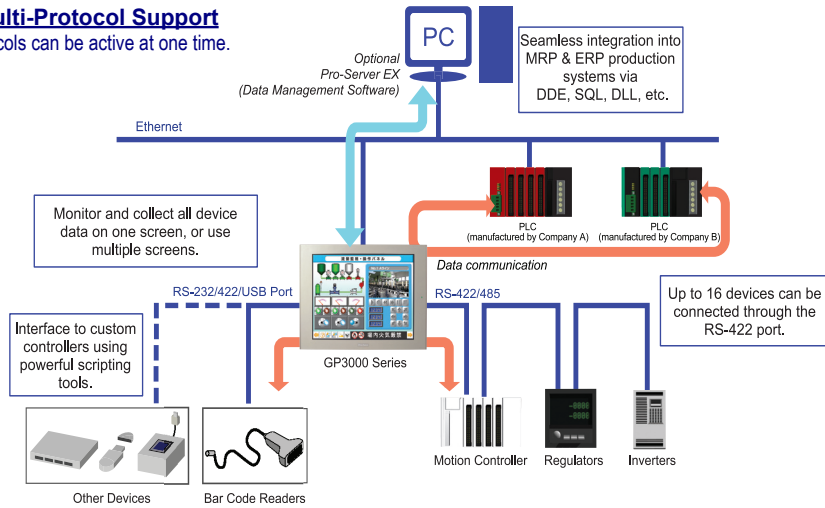

Pro-face America
 Phone: 734.429.4971
 Fax: 734.429.1010
www.profaceamerica.com
 DS-AGP3400T_FLC(C)

Customer Service Hotline: 734.944.0482

For more information
ACCESS www.profaceamerica.com

Pro-face
 Human Machine Interface



California Proposition 65 Warning—Lead and Lead Compounds

Advertencia de la Proposición 65 de California—Plomo y compuestos de plomo

Avertissement concernant la Proposition 65 de Californie—Plomb et composés de plomb

⚠ WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov.

⚠ ADVERTENCIA: Este producto puede exponerle a químicos incluyendo plomo y compuestos de plomo, que es (son) conocido(s) por el Estado de California como causante(s) de cáncer y defectos de nacimiento u otros daños reproductivos. Para mayor información, visite : www.P65Warnings.ca.gov.

⚠ AVERTISSEMENT: Ce produit peut vous exposer à des agents chimiques, y compris plomb et composés de plomb, identifiés par l'État de Californie comme pouvant causer le cancer et des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter: www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca