

12.1" Multi-Port Operator Interface



**TouchPanel
Operation**



12.1-inch TFT Color
Multi-port Operator Interface

AC / DC 24V

12.1" inch

AGP3600T

Model: AGP3600-T1-D24, AGP3600T-T1-AF

VM Unit
CF Card
Ethernet

Powered by







Features:

- Bright, energy efficient LED backlit, 65,536 color TFT Display
- 64-bit RISC 266Mhz CPU for Ultra Fast Screen Refresh and Data Sampling
- No Grid Analog Touch Panel for Improved Visibility and Precise Part Placement
- Supports Up to Four Protocol Drivers Simultaneously
- High Speed Application Transfer, 10 Times Faster than Conventional Operator Interfaces
- 100 Base-T Ethernet, USB, Serial (MPI) and CompactFlash™ Communication Interfaces
- Audio Output, Alarm, Buzzer Remote Reset Interfaces
- Video Camera Support using Optional GP3000-VM01 Video Mix Module


Specifications

Model	AGP3600-T1-AF	AGP3600-T1-D24
Graphics Display Resolution	800 x 600 pixels	
Display Type and Size	TFT Color LCD (12.1 inch)	
Display Colors	65,536 Colors	
Display Area	248.0mm[9.76in.] x 186.5mm[7.34in.]	
Touch Screen	Resistive film analog 1024 x 1024 resolution	
USB	2 ports USB1.1, USB TYPE-A connector	
CF Card	1 slot CompactFlash™, TYPE II	
Serial	COM 1: RS-232C/422/485 configurable, 9 pin D-sub plug, Data Transmission Speed: 2400 to 115.2 kbps COM 2: RS-422/485, 9 pin D-sub socket, Data Transmission Speed: 2400 to 115.2 kbps (MPI Direct 187.5 kbps)	
Ethernet	Ethernet IEEE802.3, 10BASE-T/100BASE-TX, modular jack connector (RJ-45)	
Backlight	LED Backlit (Rev. 5 and newer, not user replaceable), CCFL (Rev. 4 and older, user replaceable) Service life: 54,000 hrs. or more at 25°C (77°F) and 24 hrs. operation)	
Brightness and Contrast Controls	8 levels of adjustment available via touch panel	
Programming Memory	8MB FEPRAM (< Rev 4), 16MB (Rev 4 and up, using GP-Pro EX V2.6 or later)	
Backup Memory	320kb SRAM with battery backup	
AUX Input/Output	AUX Discrete Output: Alarm Output, RUN Output, Buzzer Output, Rated: DC24V @ 50mA AUX Discrete Input: Remote Reset Input, Rated: DC24V @ 6mA Operating Voltage: ON State: DC9V or greater, OFF State: DC2.5V or less	
Sound Output	Speaker output 70mW (Rated Load: 8ohm, Frequency: 1kHz)	

General Specifications

Input Voltage	100V AC to 240V AC	DC24V (Rated voltage DC19.2 to 28.8V)
Power Consumption	Rev. 5 and newer: 100V AC 0.9A or less (typical 0.40A), 240V AC 0.45A or less (typical 0.23A) Rev. 4 and older: 100V AC 0.9A or less (typical 0.58A), 240V AC 0.45A or less (typical 0.26A)	Rev. 5 and newer: DC24V 2.08A or less (typical 1.0A) Rev. 4 and older: DC24V 2.08A or less (typical 1.3A)
Ambient Operating Temp.	0°C (32°F) to 50°C (122°F)	
Storage Temperature	-20°C (-4°F) to 60°C (140°F)	
Altitude Endurance	800hPa to 1114hPa (2000 meters or lower)	
Certifications	CE, CSA, UL Listed Cl 1 Div 2, RoHS, ATEX	
Humidity - Ambient/Storage	10%RH to 90%RH (non-condensing, wet bulb temperature: 39°C (102°F) or less)	
Noise Immunity	Noise Voltage: 1500Vp-p Pulse Duration: 1µs Arise Time: 1ns	
Cooling Method	Natural air circulation	
Electrostatic Discharge Immunity	6kV (complies with EN 61000-4-2 Level 3)	
Vibration Resistance	IEC61131-2 compliant. 5Hz to 9Hz single amplitude 3.5mm, 9Hz to 150Hz fixed acceleration 9.8m/s ² , X, Y, Z directions for 10 times (100min.)	
Shock during operation	EN/IEC 60068-2-2 compliant, 147m/Sec, 11msec (Approx. 15G), 3 shocks to 3 direction/ axis	
Rating	Equivalent to IP65f, Nema #250 Type 4x/13 (Equivalent to NEMA 12 with the addition of "Oil or Spraying and Splashing")	
Weight	3.0kg [6.6lb] or less	
External Dimensions	W313mm[12.31in.] x H239mm[9.41in.] x D56mm[2.20in.]	
Warranty	Two-year standard (maximum 4 years)	


AGP3600T - External Dimensions

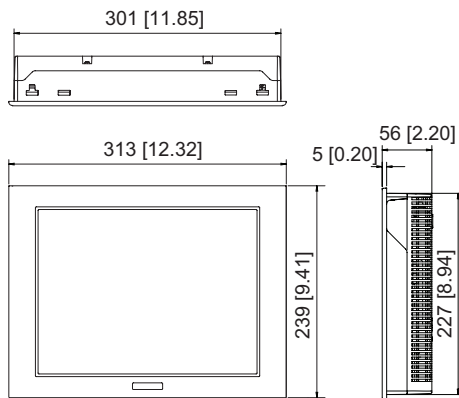

AGP-3600T(AC type) unit shown.

AGP3600T - Cut-Out Dimensions

Unit: mm [in.]

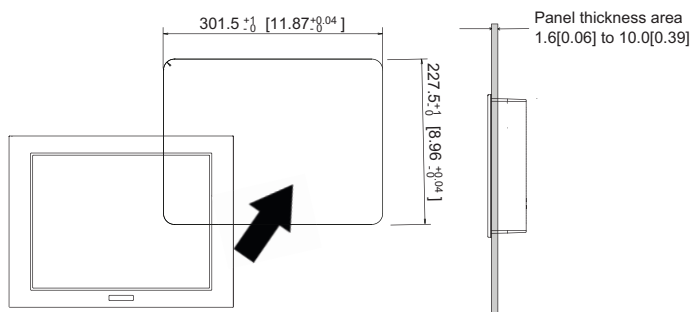

Ordering Information

Part Number	Description
AGP3600-T1-AF	12.1" TFT, USB, Ethernet, Serial HMI, 100VAC to 240VAC
AGP3600-T1-D24	12.1" TFT, USB, Ethernet, Serial HMI, 24VDC

Optional Items

Part Number	Product Name
HMI-CAB-ETH	Ethernet Crossover Cable: HMI to PLC Ethernet port or to program HMI
CA3-USBCB-01	USB download cable, PC USB port to AGP USB port
CA5-DFS10-01	Screen Protection Sheet (5 sheets/set)
GP-Pro EX (EX-ED-Vx)	Screen and Logic Development Software
PLC Cables & Accessories	See AGP3000 Connectivity Document

Caution: Before operating any of these products, please be sure to read all related manuals thoroughly.

- All product names used in this document are trademarks or registered trademarks of their respective companies.
- All information contained in this document is subject to change without notice.

Cut-Out Compatibility



Old model

Panel cutout dimensions

AGP3000 model


Investment Protection

Series name	Size	301.5x227.5
GP77R Series	GP577R Series	
GP2000 Series	GP2600/01 Series GP2500/01 Series	
GP3000 Series	GP-3600 Series GP-3500(STN) Series	

Drop-in replacement for GP2600, GP2500, and GP577R units


Simultaneous Multi-Protocol Support

Up to four different protocols can be active at one time.

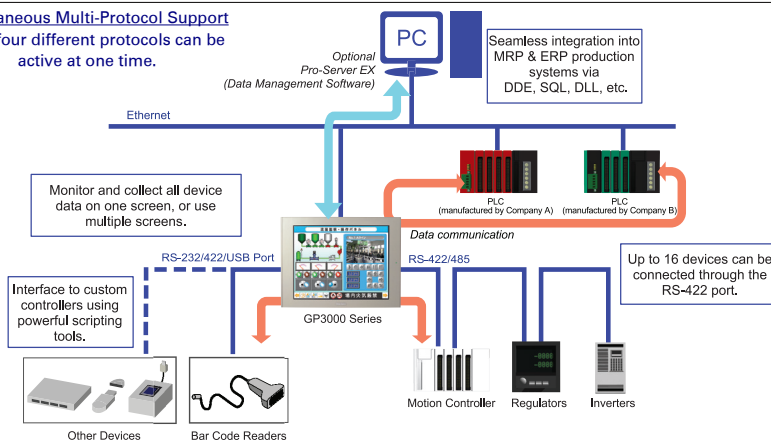

Remote Video Monitoring

Add up to four additional cameras using optional GP3000-VM01 Video Mix Unit

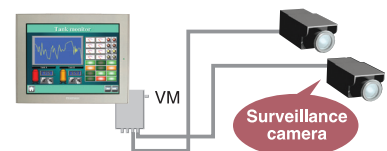

Video images provide virtual on-site monitoring of line conditions.

Applications

- Inline Process Monitoring
- Machine Safety
- Security

Pro-face America

Phone: 734.477.0600

Fax: 734.864.7347

www.profaceamerica.com

DS-AGP3600T(D)

Customer Service Hotline: 800-289-9266

For more information

ACCESS

www.profaceamerica.com

Pro-face
for the best interface



California Proposition 65 Warning—Lead and Lead Compounds

Advertencia de la Proposición 65 de California—Plomo y compuestos de plomo

Avertissement concernant la Proposition 65 de Californie—Plomb et composés de plomb

⚠ WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov.

⚠ ADVERTENCIA: Este producto puede exponerle a químicos incluyendo plomo y compuestos de plomo, que es (son) conocido(s) por el Estado de California como causante(s) de cáncer y defectos de nacimiento u otros daños reproductivos. Para mayor información, visite : www.P65Warnings.ca.gov.

⚠ AVERTISSEMENT: Ce produit peut vous exposer à des agents chimiques, y compris plomb et composés de plomb, identifiés par l'État de Californie comme pouvant causer le cancer et des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter: www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca