


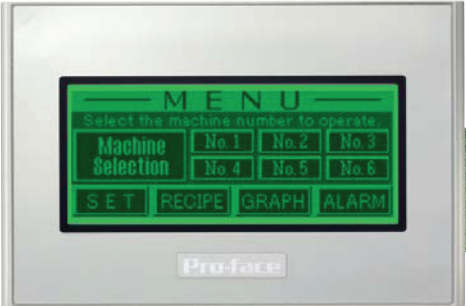

3.4" Compact HMI with TouchPanel - AGP4100 Series

3.4-inch
Fan-less, Diskless Compact HMI

AGP4100

Model: AGP4105-G1-D24 AGP4105-W1-D24
 AGP4106-G1-D24 AGP4106-W1-D24
 AGP4107-G1-D24 AGP4107-W1-D24

CPU: 64-bit RISC 133Mhz

Powered by
 Screen Editor
GP-Pro EX

UL LISTED SF UL US CE Ro

* AGP4105 / AGP4106

Features:

- Crisp, clear and bright, 200 x 80 resolution Monochrome LCD Display
- No Grid Analog Touch Panel for improved visibility and precise part placement
- Touch Panel operation with in a text panel replacement form factor
- Energy efficient, maintenance free LED backlight

- G1 models have a Green display supporting event based change to Orange/Red to alert operators
- W1 models have a White display supporting event based change to Pink/Red to alert operators
- 2 USB ports, plus one Serial Interface available in RS232, 422/485 or MPI
- Programs with the free Limited Edition of GP-Pro EX

Performance Specifications

Model	AGP4105-G1-D24 AGP4105-W1-D24	AGP4106-G1-D24 AGP4106-W1-D24	AGP4107-G1-D24 AGP4107-W1-D24
Display	Type	3.4" Monochrome LCD	
	Colors	AGP410x-G1 models: Green / Orange / Red (16 shades) AGP410x-W1 models: White / Pink / Red (16 shades)	
	Backlight	LED (service life: Green/White 50,000 hrs., Red 10,000 hrs. at 25°C and 24hr. operation)	
	Resolution	200 x 80 pixels	
	Brightness Adjustment	16 levels of adjustment available via touch panel	
	Contrast Adjustment	8 levels of adjustment available via touch pane	
	Touch Panel	Resistive Film (Analog) 1024 x 1024	
Memory	Application	2.2MB Flash EPROM	
	Data Backup	No Internal backup SRAM	
Interfaces	Serial (COM1) Interface	RS-232C 9 pin Screw Terminal, Speed: 2400 to 115.2 kbps	RS-422/485, 9 pin Screw Terminal, Speed: 2400 to 115.2 kbps
		RS-485 MPI (Isolated), 9 pin D-sub socket, Speed: 2400 to 115.2 kbps, 187.5 kbps (MPI)	
	USB Interface	1x USB 2.0 (Host) Type A (for PC or USB Memory project transfer and Barcode Input) 1x USB 2.0 (Host) Type mini-B (for project transfer)	

General Specifications

Model	AGP4105-G1-D24, AGP4105-W1-D24	AGP4106-G1-D24, AGP4106-W1-D24	AGP4107-G1-D24, AGP4107-W1-D24	
Electrical	Input Voltage	24V DC		
	Rated Voltage	19.2V DC to 28.8V DC		
	Power Consumption (without USB devices)	2.7W or less	3.0W or less	3.4W or less
	Power Consumption (powering USB devices)	6.0W or less	6.2W or less	6.5W or less
Environmental	Ambient Operating Temp.	0°C (32°F) to 50°C (122°F)		
	Storage Temperature	-20°C (-4°F) to 60°C (140°F)		
	Humidity	10%RH to 90%RH (non-condensing, wet bulb temperature: 39°C (102°F) or less)		
	Altitude Operation	800hPa to 1114hPa (2000 meters above sea level or lower)		
Structural	Vibration & Shock Resistance	IEC/EN61131-2 compliant 5 to 9 Hz single-amplitude 3.5 mm [0.14 in.] 9 to 150 Hz constant-accelerated velocity 9.8 m/s² X,Y, Z directions for 10 cycle (100 minute)		
	Ratings	Equivalent to IP65f, Nema #250 Type 4x/13		
	Certifications	UL/c-UL Listed, CSA (UL508, CSA-C22.2 No.142-M1987), CE EN61000-6-2, EN61000-6-4, EN61131-2, RoHS	CE EN61000-6-2, EN61000-6-4, EN61131-2, RoHS	
	External Dimensions	W 116.5mm [4.59in] X H 77.5mm [3.05in] X D 28mm [1.1in]		
	Weight	0.2kg [0.4lb]		
Warranty	Two year standard			

Communication Capability

PLC/Controllers		Temperature / Process Controllers	
Rockwell Automation	DF1	Omron Corporation	Temp Controller CompoWay/F
	DH-485	Yokogawa Electric	Personal Computer Link SIO
Siemens AG	SIMATIC S7 3964(R)/RK512	Fuji Electric Systems	Temp Controller Modbus SIO
	SIMATIC S7 MPI Direct (AGP4107)	Industrial Robot Controllers	
	SIMATIC S5 CPU Direct	IAI Corporation	Robo Cylinder Modbus SIO
	SIMATIC S5 3964(R)		X-SEL Controller
Schneider Electric	Modbus SIO Master	Inverter / Servo	
	Modbus SIO Slave	Yaskawa Electric	Inverter SIO
	Uni-Telway	Mitsubishi Electric	FREQROL Inverter
Modbus IDA	General Modbus RTU SIO Master	Other Devices	
Koyo Electronics	Kostac/DL Series CCM SIO	Digital Electronics Corporation	Memory Link
Yaskawa Electric	Memobus SIO	General SIO	
	MP Series SIO (Extension)	The list above is a small selection of the many drivers that are supported by the AGP4100 Series HMI. In addition the AGP4100 Series HMI support USB code readers and USB Storage Devices for Project Transfer without PC.	
Omron Corporation	C/CV Series HOST Link	Pro-face continuously adds and updates drivers and makes these available free of charge on the Otasuke-Pro! Technical Support website.	
	CS/CJ Series HOST Link		
Mitsubishi Electric	A / FX Series CPU Direct	For a full list of supported drivers, new drivers and updates visit: https://www.hmisource.com/otasuke/download/update	
	A / FX Series Computer Link		
	Q / QnA / QUTE Series CPU Direct		
	Q / QnA Series Serial Comm.		

Ordering Information

Part Number	Description
AGP4105-G1-D24	3.4" Mono (Green/Orange/Red), 1 Serial RS232C, 2 USB, 24VDC
AGP4105-W1-D24	3.4" Mono (White/Pink/Red), 1 Serial RS232C, 2 USB, 24VDC
AGP4106-G1-D24	3.4" Mono (Green/Orange/Red), 1 Serial RS422/485, 2 USB, 24VDC
AGP4106-W1-D24	3.4" Mono (White/Pink/Red), 1 Serial RS422/485, 2 USB, 24VDC
AGP4107-G1-D24	3.4" Mono (Green/Orange/Red), 1 Serial RS485(MPI), 2 USB, 24VDC
AGP4107-W1-D24	3.4" Mono (White/Pink/Red), 1 Serial RS485 (MPI), 2 USB, 24VDC

Optional Items

Part Number	Product Name
EX-ED-Vxx	Screen Editor Software (Limited Edition)
<p>Note: Limited Edition of GP-Pro EX (V2.6 or later) can be used to program the AGP4100 Series. Please visit www.profaceamerica.com to download this fully functional Limited Edition (previously called "Trial version")</p>	
ZC9USCBMB1	Transfer/Programming Cable USB: HMI type mini-B Port to PC USB type A Port
ZC9USEXMB1	USB type mini-B Front Panel Access Cable: 1M
CA5-USBEXT-01	USB type A Front Panel Access Cable: 1M
ZC9DS31	Touch Screen Protection Sheet (Qty 5)
ZC9USCL1	USB Cable clamp (Qty 5) type A USB port
ZC9USCLMB1	USB Cable clamp (Qty 5) type mini-B USB port
ZC9WG31	Replacement Gasket
ZC9AF31	Replacement Mounting Fasteners, 1 set of 2
ZC9CMC1	Replacement Serial Interface Connector for 4105/4106
CA6-USB232-01	Converts USB type A to 9 pin D-Sub RS-232C Serial Port
ZC9CBQ31	RS232C Cable, 3M, 4105 to Mitsubishi PLC Q Series
ZC9CBFX11	RS422/485 Cable, 1M, 4106 to Mitsubishi PLC FX Series
ZC9CBFX51	RS422/485 Cable, 5M, 4106 to Mitsubishi PLC FX Series
ZC9CBA51	RS422/485 Cable, 5M, 4106 to Mitsubishi PLC A Series
ZC9CBFP21	RS232C Cable, 2M, 4105 to Panasonic FP Series PLC

Caution: Before operating any of these products, please be sure to read all related manuals thoroughly.

- All product names used in this document are trademarks or registered trademarks of their respective companies.
- All information contained in this document is subject to change without notice.

Small Cutout, Flexible Mounting Solutions



Landscape Mounted



Portrait Mounted

Cutout Dimensions: W 105.0mm [4.13in] x 66.0mm [2.60in]

Software Compatibility




Powered by


Screen Editor
GP-Pro EX

HMI Development Software

Program the AGP4100 Series HMI with the Limited Edition of GP-Pro EX V2.60 (or later) available as free download from www.profaceamerica.com.



Mounting Fasteners



Optional Front Panel USB Access

Pro-face America

Phone: 800.289.9266

Fax: 734.864.7347

www.profaceamerica.com

For more information

ACCESS

www.profaceamerica.com

Pro-face



California Proposition 65 Warning—Lead and Lead Compounds

Advertencia de la Proposición 65 de California—Plomo y compuestos de plomo

Avertissement concernant la Proposition 65 de Californie—Plomb et composés de plomb

⚠ WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov.

⚠ ADVERTENCIA: Este producto puede exponerle a químicos incluyendo plomo y compuestos de plomo, que es (son) conocido(s) por el Estado de California como causante(s) de cáncer y defectos de nacimiento u otros daños reproductivos. Para mayor información, visite : www.P65Warnings.ca.gov.

⚠ AVERTISSEMENT: Ce produit peut vous exposer à des agents chimiques, y compris plomb et composés de plomb, identifiés par l'État de Californie comme pouvant causer le cancer et des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter: www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca