

5.7" Operator Interface - AST3301S/AST3301B



Features:

- Graphical Touch Screen
- STN color or Blue/White (256 colors) LCD
- 320 x 240 Resolution
- NEMA 4x/13
- 2 Year Warranty
- Dual Simultaneous Protocol Support
- USB/Barcode Reader Support
- RS232, RS422/RS485 Configurable Serial Ports
- GP-Pro EX HMI Development Environment

Performance Specifications

Model	AST3301-S1-D24	AST3301-B1-D24
Display Type	STN Color LCD	Monochrome Blue/White LCD
Display Colors	256 Colors (no Blink/64 Colors (3-speed Blink))	8 shades of blue and white
Display Area	115.2mm (4.54in)W x 86.4mm (3.40in)H	
Graphics Display Resolution	(320 x 240 resolution)	
Backlight	CCFL, MTBF Value 75,000hrs (TYP) or more	CCFL, MTBF Value 58,000hrs (TYP) or more
Contrast Adjustment	8 gradations (adjustable via touch panel)	
Touch Screen	Resistive Film (analog)	
USB (Type A)	USB Interface (USB 1.1) Type A connector x1	
Serial Interface	COM1 RS-232C, COM2: RS422/485	

5.7-inch STN Color LCD/ Monochrome LCD
Operator Interface

AST-3301S
AST-3301B



Models: AST3301-S1-D24/AST3301-B1-D24




General Specifications

Model	AST3301-S1-D24	AST3301-B1-D24
Input Voltage	DC24V	
Power Consumption	18W or less	
Allowable Voltage Drop	Within 10ms	
Voltage Endurance	AC1500V 20mA for 1 minute (between charging and FG terminals)	
Insulation Resistance	DC500V 10MΩ(min.) (between charging and FG terminals)	
Certifications	UL508, c-UL, CE, CSA-C22.2 No.142-M1987, EN55011 Class A, RoHS	
Ambient Operating Temperature ²	Operating Temperature 0 to 50°C (unit must be installed within 30° of vertical)	
Humidity - Ambient/Storage	10 to 90% RH (Not condensing, wet bulb temperature: 39°C or less).	
Corrosive Gas	Free of corrosive gases	
Noise Immunity	Noise Voltage: 1000Vp-p, Pulse Duration: 1μs, Rise Time: 1ns (via noise simulator)	
Grounding	Grounding resistance of 100Ω 2mm ² or thicker wire, or your country's applicable standard. (same for FG and SG terminals)	
Electrostatic Discharge Immunity	6kV (complies with EN 61000-4-2 Level 3)	
Vibration Resistance	IEC61131-2 compatible, 5Hz to 9Hz Half Amplitude 3.5mm, 9Hz to 150Hz Constant Acceleration 9.8m/s ² , Applied in X, Y and Z directions 10 cycles for 100 minutes	
Rating	Equivalent to IP65f (NEMA #250 4x/13 (for front panel of installed unit) ²	
Weight	Approx. 1.0kg [2.2lb]	
External Dimensions	167.6mm [6.59in.] W × 135mm [5.31in.] H × 59.5mm [2.34in.] D	
Warranty	Two (2) year	

*1 Ambient Operating Temperature indicates the cabinet interior or panel face temperature.

*2 Meets IP65f testing requirements. Operation is not, however, guaranteed in every environment.

AST-3301S/B - External Dimensions

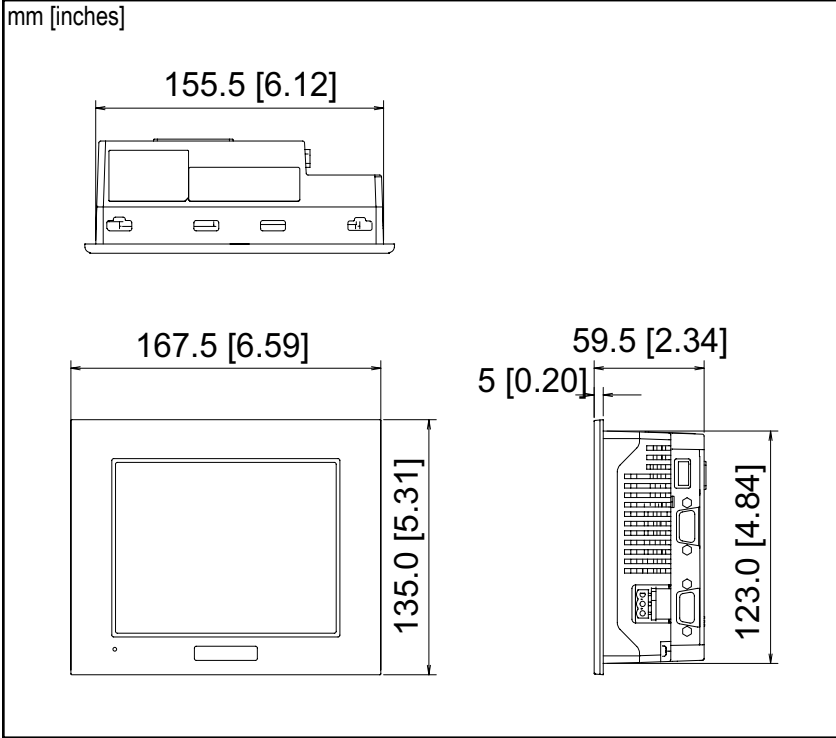

Ordering Information

Part Number	Description
AST3301-S1-D24	5.7" STN Color LCD, Serial, USB, DC24V
AST3301-B1-D24	5.7" Monochrom Blue/White LCD, Serial, USB, DC24V


Accessories or Replacement Components

Product Name	Part Number
USB Transfer Cable	CA3-USBCB-01 (2m)
Installation Fasteners ^{*1}	CA3-ATFALL-01
GP-Pro EX HMI Development Software	EX-ED-V21
Screen Protection Sheet (5 sheets/set)	CA3-DFS6-01

*1 AST bundles maintenance items. You only need to purchase new items in case of breakage or loss.

- All information contained in this document is subject to change without notice.

AST-3301S/B - Cut-Out Dimensions

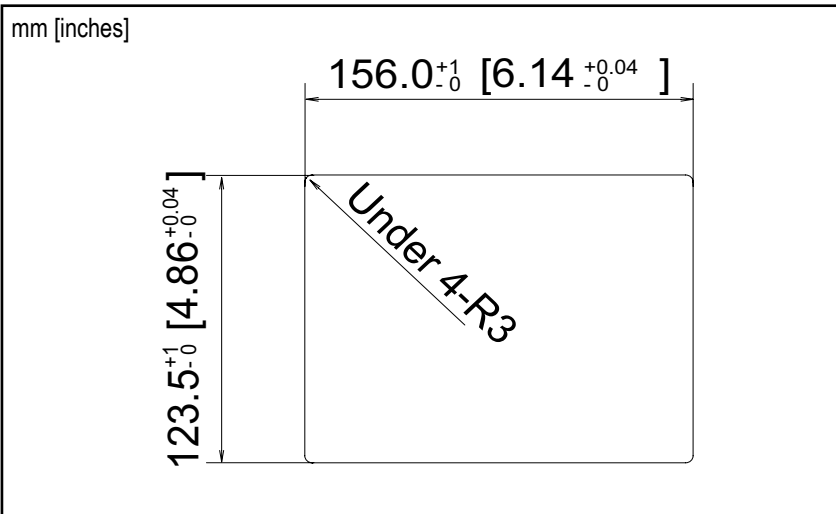

Pro-face America
 Phone: 734.429.4971
 Fax: 734.429.1010
www.profaceamerica.com

Customer Service Hotline: 734.944.0482

For more information
ACCESS www.profaceamerica.com



California Proposition 65 Warning—Lead and Lead Compounds

Advertencia de la Proposición 65 de California—Plomo y compuestos de plomo

Avertissement concernant la Proposition 65 de Californie—Plomb et composés de plomb

⚠ WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov.

⚠ ADVERTENCIA: Este producto puede exponerle a químicos incluyendo plomo y compuestos de plomo, que es (son) conocido(s) por el Estado de California como causante(s) de cáncer y defectos de nacimiento u otros daños reproductivos. Para mayor información, visite : www.P65Warnings.ca.gov.

⚠ AVERTISSEMENT: Ce produit peut vous exposer à des agents chimiques, y compris plomb et composés de plomb, identifiés par l'État de Californie comme pouvant causer le cancer et des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter: www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca