

10.4" Industrial Flat Panel Display - FP-3500T



TouchPanel Operation

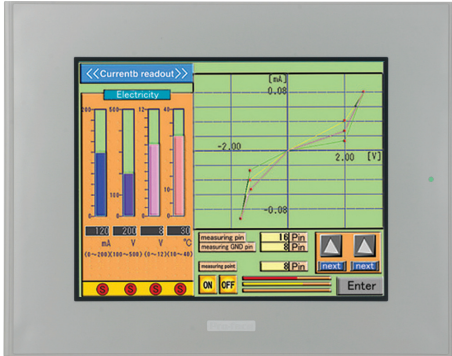


Figure is FP3500-T41

Features:

- VGA Display TFT Touch Panel
- DVI Compatible
- Touch-panel Mouse emulation
- 262,144 colors
- VESA Mounting (75mm)*3
- NEMA 4/4x/12 Rated (IP65F)
- RoHS Directive-conforming
- Bottom USB interface
- UL, cUL, CE (only for DC24V model)

Performance Specifications

Model	FP3500-T11 FP3500-T41-24V
Display Type	TFT Color LCD
Display Colors	262,144 Colors
Display Area	211.2mm [8.31in.] x 158.4mm [6.24in.]
Video	VGA Interface (analog RGB) Connector or DVI-D ¹ Interface Connector
Graphics Display Resolution	VGA (640 x 480 dots)
Backlight	CCFL (Replaceable)
Contrast Adjustment	Adjustable via OSD
Touch Screen	RS-232C or USB (Type B, USB 2.0 compatible)
USB (Type A) ²	Bottom port (USB 2.0 compatible)

*1 Use one or the other.
*2 Available for use when the touch panel USB cable (B type) is connected to a PC.
*3 Need to use Rear cover <CA1-RCVLRG-01>

10.4 1-inch TFT Color LCD
Flat Panel Monitor

FP-3500T AC100/240V 10.4-inch
VGA

Models: FP3500-T11, FP3500-T41-24V

VGA (640 x 480) Analog or DVI-D

*Certifications, except RoHS, outlined for 24V DC unit only.




General Specifications

Model	FP3500-T11	FP3500-T41-24V
Input Voltage	AC100 / 240V (50/60Hz)	DC24V
Power Consumption	AC100 V0.90A or less, AC240 V0.45A or less	2.08A or less
Allowable Voltage Drop	1 cycle or less (Voltage drop interval must be 1s or more.)	Within 10ms
Voltage Endurance	AC1500V 20mA for 1 minute	AC1000V 20mA for 1 minute
Insulation Resistance	DC500V 10MΩ(min.) (between charging and FG terminals)	
Certifications	RoHS	UL508, CE, CSA-C22.2 No.142-M1987, EN55011 Class A, EN61000-6-2, RoHS
Ambient Operating Temperature ⁴	Operating Temperature 0 to 50°C (unit must be installed within 30° of vertical)	
Humidity - Ambient/Storage	10 to 90% RH (Not condensing, wet bulb temperature: 39°C or less).	
Corrosive Gas	Free of corrosive gases	
Noise Immunity	Noise Voltage: 1500Vp-p, Pulse Duration: 1μs, Rise Time: 1ns (via noise simulator)	Noise Voltage: 1000Vp-p, Pulse Duration: 1μs, Rise Time: 1ns
Grounding	100Ω or less	
Electrostatic Discharge Immunity	6kV (complies with EN 61000-4-2)	
Vibration Resistance	JIS B 3502, IEC61131-2 compatible, 5Hz to 9Hz Half Amplitude 3.5mm, 9Hz to 150Hz Constant Acceleration 9.8m/s ² , Applied in X, Y and Z directions 10 cycles for 100 minutes	
Rating	Equivalent to IP65f (only for the front area when the panel is installed) ⁵	
Weight	Approx. 3.5kg [7.7lb]	
External Dimensions	317mm [12.48in.] W × 243mm [9.57in.] H × 58mm [2.28in.] D	
Warranty	Two (2) year	

⁴ Ambient Operating Temperature indicates the cabinet interior or panel face temperature.
⁵ Meets IP65f testing requirements. Operation is not, however, guaranteed in every environment.

FP-3500T - External Dimensions

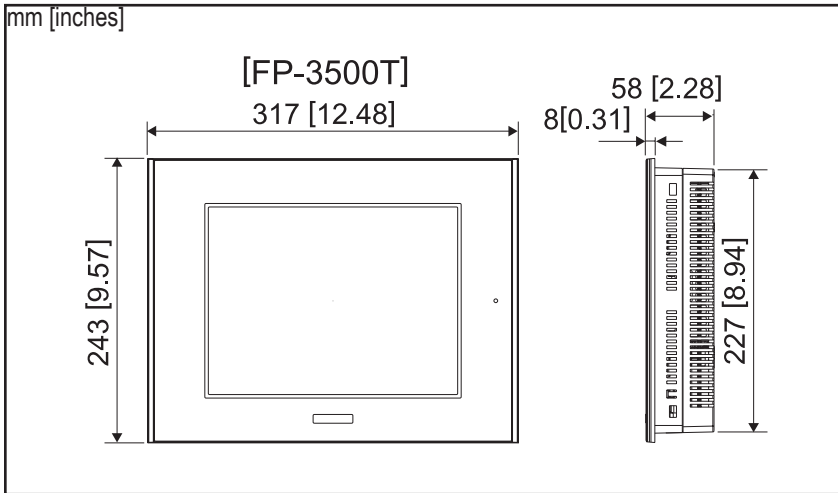

Ordering Information

Part Number	Description
FP3500-T11	10.4" TFT Color LCD, AC
FP3500-T41-24V	10.4" TFT Color LCD, DC24V



Accessories or Replacement Components

Product Name	Part Number
Touch Interface	
Serial Interface Cable	5m FP61V-IS00-O
USB Cable	5m FP-US00
Video Interface	
Analog RGB Cable	4.5m FP-CV02-45
DVI-D Cable	5m FP-DV01-50
Installation Fasteners	GP070-AT01
Backlight (2 pieces/set for 1 unit)	GP577RT-BL00-MS
Screen Protection Sheet (5 sheets/set)	PSL-DF00

Caution: Before operating any of these products, please be sure to read all related manuals thoroughly.

- All product names used in this document are trademarks or registered trademarks of their respective companies.
- All information contained in this document is subject to change without notice.

FP-3500T - Cut-Out Dimensions

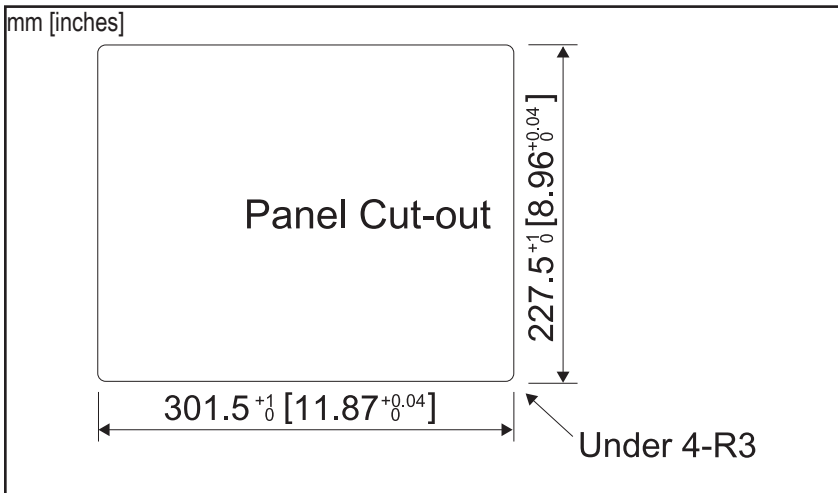

Pro-face America
Phone: 734.429.4971
Fax: 734.429.1010
www.profaceamerica.com

Customer Service Hotline: 734.944.0482

For more information
ACCESS www.profaceamerica.com



California Proposition 65 Warning—Lead and Lead Compounds

Advertencia de la Proposición 65 de California—Plomo y compuestos de plomo

Avertissement concernant la Proposition 65 de Californie—Plomb et composés de plomb

⚠ WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov.

⚠ ADVERTENCIA: Este producto puede exponerle a químicos incluyendo plomo y compuestos de plomo, que es (son) conocido(s) por el Estado de California como causante(s) de cáncer y defectos de nacimiento u otros daños reproductivos. Para mayor información, visite : www.P65Warnings.ca.gov.

⚠ AVERTISSEMENT: Ce produit peut vous exposer à des agents chimiques, y compris plomb et composés de plomb, identifiés par l'État de Californie comme pouvant causer le cancer et des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter: www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca