

12" XGA(1024 x 768) Flat Panel Monitor - FP3650T



Features:

- 12.1-inch (XGA 1024x768) TFT monitor
- VESA Mounting (75mm)*1
- DVI Compatible
- Bottom USB interface
- 262,144 million colors
- NEMA 4/4x/12 Rated (IP65F)
- RoHS Directive-conforming
- UL, cUL, CE

Performance Specifications

Model	FP3650-T41 Series
Display Type	TFT Color LCD (12.1 inch)
Display Colors	262,144 Colors
Display Area	245.76mm [9.86 in.] × 184.32mm [7.26in.]
Video	Analog RGB or DVI-D*2
Graphics Display Resolution	XGA (1024 × 768 pixels)
Backlight	CCFL (Replaceable)
Contrast Adjustment	Adjustable via OSD
Touch Screen	RS-232C or USB (Type B, USB 2.0 compatible)
USB (type A)*3	Bottom 1 port (USB 2.0 compatible)


*1 Need to use Rear cover <CA1-RCVLRG-01>
 *2 Use one or the other.
 *3 Available for use when the touch panel USB cable (B type) is connected to a PC.

General Specifications

Model	FP3650-T41 Series (AC Model)
Input Voltage	AC100V to 240V (50/60Hz)
Power Consumption	AC100V 0.90A or less AC240V 0.45A or less
Allowable Voltage Drop	1 cycle or less (Voltage drop interval must be 1s or more.)
Voltage Endurance	AC1500V 20mA for 1 minute
Insulation Resistance	DC500V 10MΩ(min.) (between charging and FG terminals)
Certifications	UL60950-1, CSA-C22.2 No 60950-1-03, CE (EN55011 Class A, EN61000-6-2, EN60950-1), RoHS
Ambient Operating Temperature**	0 to 50°C (32 to 122°F) (within 30° from the installing angle vertical direction)
Humidity - Ambient/Storage	10 to 90% RH (Not condensing, wet bulb temperature: 39°C (84.2°F) or less). Storage Temperature -20 to +60°C (-4 to 140°F)
Corrosive Gas	Free of corrosive gases
Noise Immunity	Noise Voltage: 1500Vp-p, Pulse Duration: 50ns, 500ns, 1μs Rise Time: 1ns (via noise simulator)
Electrostatic Discharge Immunity	6kV (complies with EN 61000-4-2 Level 3)
Vibration Resistance	JIS B 3502, IEC61131-2 compatible, 5Hz to 9Hz Half Amplitude 3.5mm, 9Hz to 150Hz Constant Acceleration 9.8m/s ² , Applied in X, Y and Z directions 10 cycles for 100 minutes
Rating	Equivalent to IP65f
Weight	Approx. 3.5kg [7.7lb]
External Dimensions	317mm [12.48in.] × 243mm [9.57in.] × 58mm [2.28in.] D
Warranty	Two (2) year

*4 "Ambient Operating Temperature" indicates the cabinet interior or panel face temperature.

FP3650T - External Dimensions - North American Version

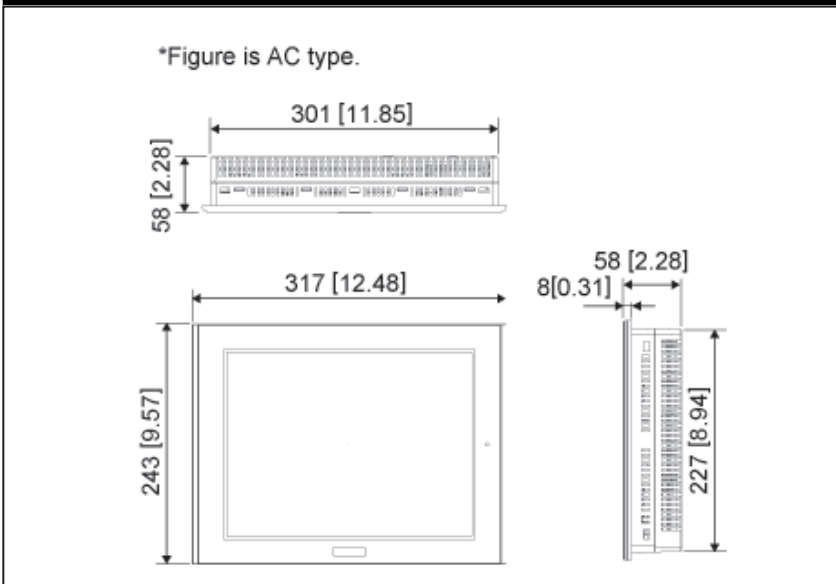

Ordering Information

Part Number	Description
FP3650-T41	12" TFT Color LCD

Accessories or Replacement Components


Product Name	Part Number
Touch Interface	
Serial Interface Cable	5m FP61V-IS00-O
USB Cable	5m FP-US00
Video Interface	
Analog RGB Cable	4.5m FP-CV02-45
DVI-D Cable	5m FP-DV01-50
Installation Fasteners*1	GP070-AT01
Backlight (2 pieces/set for 1 unit)*1	CA5-BLU12XGA-01
Screen Protection Sheet (5 sheets/set)	PSL-DF00

*1 Standard attachment for all models.

Caution: Before operating any of these products, please be sure to read all related manuals thoroughly.

- All product names used in this document are trademarks or registered trademarks of their respective companies.
- All information contained in this document is subject to change without notice.

FP3650T - Cut-Out Dimensions - North American Version

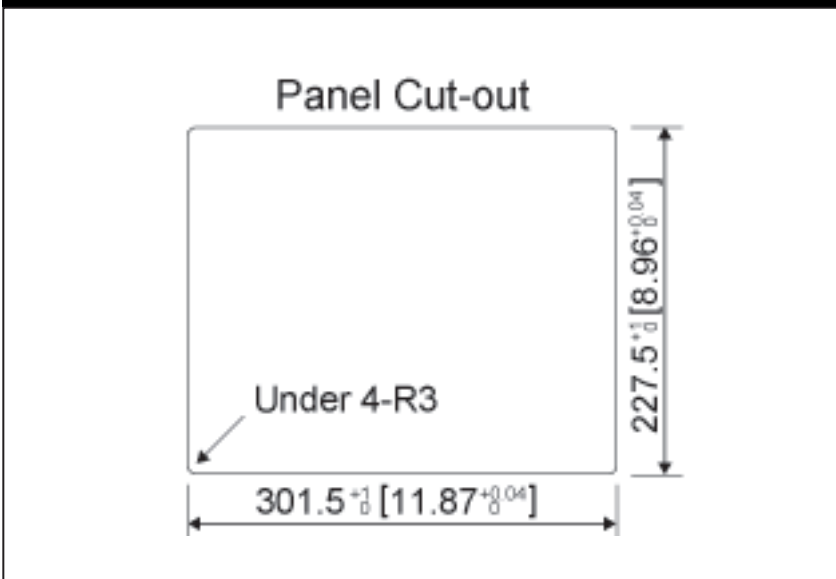

Pro-face America
Phone: 734.429.4971
Fax: 734.429.1010
www.profaceamerica.com

Customer Service Hotline: 734.944.0482

For more information
ACCESS www.profaceamerica.com



California Proposition 65 Warning—Lead and Lead Compounds

Advertencia de la Proposición 65 de California—Plomo y compuestos de plomo

Avertissement concernant la Proposition 65 de Californie—Plomb et composés de plomb

⚠ WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov.

⚠ ADVERTENCIA: Este producto puede exponerle a químicos incluyendo plomo y compuestos de plomo, que es (son) conocido(s) por el Estado de California como causante(s) de cáncer y defectos de nacimiento u otros daños reproductivos. Para mayor información, visite : www.P65Warnings.ca.gov.

⚠ AVERTISSEMENT: Ce produit peut vous exposer à des agents chimiques, y compris plomb et composés de plomb, identifiés par l'État de Californie comme pouvant causer le cancer et des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter: www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca