

19" Industrial Flat Panel Display - FP-3900T



TouchPanel Operation



Figure is FP3900-T41-U

Features:

- SXGA Display TFT Touch Panel
- VESA Mounting (75mm and 100mm)
- DVI Compatible
- 16 million colors

- NEMA 4/4x/12 Rated (IP65F) *Not using Front USB
- RoHS Directive-conforming
- Front USB interface (FP3900-T41-U only)
- Class I, Div. 2 Hazardous Location

Performance Specifications

Model	FP3900-T41-U FP3900-T41
Display Type	TFT Color LCD
Display Colors	16,777,216 Colors
Display Area	376.32mm [14.82in.] x 301.056mm [11.85in.]
Video I/F	VGA Interface (analog RGB) Connector or DVI-D ¹ Interface Connector
Graphics Display Resolution	SXGA (1280 x 1024 dots)
Backlight	CCFL (not replaceable)
Contrast Adjustment	Adjustable via OSD
Touch Screen	RS-232C or USB (USB 2.0 compatible) ¹
USB (Type A) ²	Front port (USB 2.0 (Type B) compatible) (FP3900-T41-U only)

*1 Use one or the other.
*2 Available for use when the touch panel USB cable (B type) is connected to a PC.

19-inch TFT Color LCD
Flat Panel Monitor

FP-3900T

Models: FP3900-T41-U, FP3900-T41

AC100/240V	19-inch
SXGA	

SXGA (1280 x 1024)	Analog or DVI-D
-----------------------	--------------------




General Specifications

Input Voltage	AC100 / 240V (50/60Hz)
Power Consumption	AC100 V1.1A or less, AC240 V0.7A or less
Allowable Voltage Drop	1 cycle or less (Voltage drop interval must be 1s or more.)
Voltage Endurance	AC1500V 20mA for 1 minute
Insulation Resistance	DC500V 10MΩ(min.) (between charging and FG terminals)
Certifications	UL508, CSA-C22.2 No.142-M1987, ANSI/ISA-12.12.01-2007 (Class I, Division 2, Groups A, B, C, D Hazardous Locations), CSA-C22.2 No.213-M1987 (Class I, Division 2, Groups A, B, C, D Hazardous Locations), CE (EN55011 Class A, EN61000-6-2, EN60950-1), RoHS
Surrounding Air Temperature	0 to 50°C (unit must be installed within 30° of vertical)
Humidity - Ambient/Storage	10 to 90% RH (Not condensing, wet bulb temperature: 39°C or less).
Corrosive Gas	Free of corrosive gases
Noise Immunity	Noise Voltage: 1500Vp-p, Pulse Duration: 1μs, Rise Time: 1ns (via noise simulator)
Grounding	100Ω or less, or your country's applicable standard.
Electrostatic Discharge Immunity	6kV (complies with EN 61000-4-2 Level 3)
Vibration Resistance	JIS B 3502, IEC61131-2 compatible, 5Hz to 9Hz Half Amplitude 3.5mm, 9Hz to 150Hz Constant Acceleration 9.8m/s ² , Applied in X, Y and Z directions 10 cycles for 100 minutes
Rating	Equivalent to IP65f (not using Front USB) ²
Weight	Approx. 10.0kg [22.0lb]
External Dimensions	460mm [18.11in.] W x 390mm [15.35in.] H x 77.7mm [3.06in.] D
Warranty	Two (2) year

*2 The front face of the FP unit, installed in a solid panel, has been tested using conditions equivalent to the standards shown in the specification. Even though the FP unit's level of resistance is equivalent to these standards, oils that should have no effect on the FP can possibly harm the unit. This can occur in areas where either vaporized oils are present, or where low viscosity cutting oils are allowed to adhere to the unit for long periods of time. The FP's front face protection sheet becomes peeled off, these conditions can lead to the ingress of oil into the FP and separated protection measures are suggested. Also if non-approved oils are present, it may cause deformation or corrosion of the front panel's plastic cover. Therefore, prior to installing the FP be sure to confirm the type of conditions that will be present in the FP's operating environment. If the installation gasket is used for a long period of time, or if the unit and its gasket are removed from the panel, the original level of the protection cannot be guaranteed. To maintain the original protection level, be sure to replace the installation gasket regularly.

FP-3900T - External Dimensions

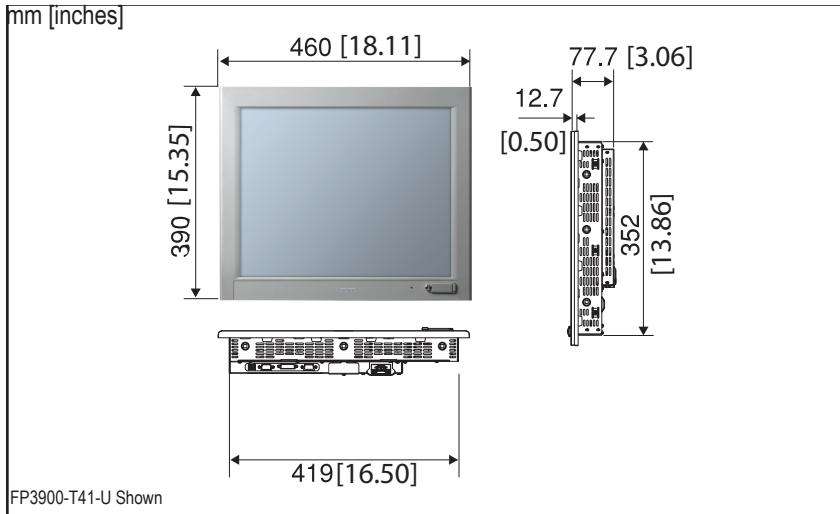

Ordering Information

Part Number	Description
FP3900-T41-U	19" TFT Color LCD, Front port (Type A USB 2.0 compatible)
FP3900-T41	19" TFT Color LCD



Accessories or Replacement Components

Product Name	Part Number	
Touch Interface		
RS-232C Cable	5m	FP61V-IS00-0
USB Cable	5m	FP-US00
Video Interface		
Analog RGB Cable	4.5m	FP-CV02-45
DVI-D Cable	5m	FP-DV01-50
Installation Fasteners		CA3-ATFALL-01
Screen Protection Sheet (5 sheets/set)		CA7-DFS19-01

Caution: Before operating any of these products, please be sure to read all related manuals thoroughly.

- All product names used in this document are trademarks or registered trademarks of their respective companies.
- All information contained in this document is subject to change without notice.

FP-3900T - Cut-Out Dimensions

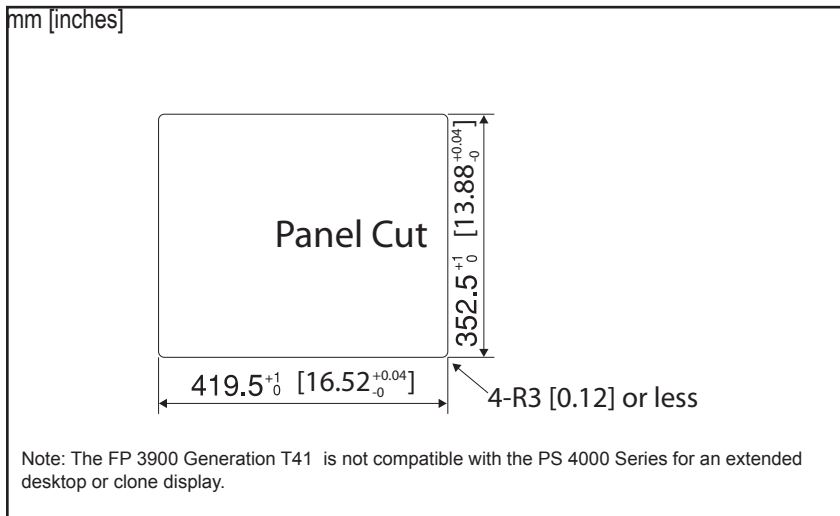

Pro-face America
 Phone: 734.477.0600
 Fax: 734.864.7347
 www.profaceamerica.com

Customer Service Hotline: 800.289.9266

For more information
ACCESS www.profaceamerica.com





California Proposition 65 Warning—Lead and Lead Compounds

Advertencia de la Proposición 65 de California—Plomo y compuestos de plomo

Avertissement concernant la Proposition 65 de Californie—Plomb et composés de plomb

⚠ WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov.

⚠ ADVERTENCIA: Este producto puede exponerle a químicos incluyendo plomo y compuestos de plomo, que es (son) conocido(s) por el Estado de California como causante(s) de cáncer y defectos de nacimiento u otros daños reproductivos. Para mayor información, visite : www.P65Warnings.ca.gov.

⚠ AVERTISSEMENT: Ce produit peut vous exposer à des agents chimiques, y compris plomb et composés de plomb, identifiés par l'État de Californie comme pouvant causer le cancer et des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter: www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca