



**GP2401H-TC41-24V**  
(6.5" TFT Color)



**GP2301H-LG41-24V**  
(5.7" Monochrome)



**GP2301H-SC41-24V**  
(5.7" STN Color)



## GP2x01 Series Handheld HMI

**5.7 and 6.5" Operator Interface Touch Screens with RS-232/RS-422 Serial Port Connectivity**

- Tethered HMIs with Full Graphic Touch Screen
- Built-in Safety Features: Emergency Shut-off, Vibration alert and 3 position system enable switch
- Ideal for use with portable machine diagnostic or maintenance carts
- Applications include Robotic Pendants, overhead crane control, and warehouse inventory control
- Includes Industry's best serial protocol support
- Extensive Multi-language Character Support
- Compatible with GP-PRO C-package 03 software

### COMMON FEATURES

- Mono, STN, TFT Touch Screens
- UL, cUL Certified
- CompactFlash™ Port
- Two Open Collector Discrete Outputs
- RS-232/422 Com Port Configurable
- 3M and 10M Length Cables Available
- Emergency Switch Output
- 24VDC Powered Units
- Oil and Impact Resistance

### INFORMATION



**Powered by:  
GP-PRO/PB III C Package03  
HMI Screen Editor  
Development Software**

- Advanced featured graphics editor for drawing objects, animation, creating pre-configured operator objects, etc.
- Recipes Trending, Alarm/Event Management, Scheduling, Pop-up keypads, etc.
- Password protected; 15 level security.
- Script functions to interface to custom OEM equipment.

### SELECTION GUIDE

Model	GP-2401HT	GP-2301HS	GP-2301HL
Display	6.5" TFT Color	5.7" STN Color	5.7" LCD Mono
Display Resolution (pixels)	640 x 480	320 x 240	320 x 240
Display Color	256 Colors	64 Colors	Black/White
Function Key	16	12	12
SIO, I/O and Power I/F	1	1	1
CF-card I/F	1 Socket	1 Socket	1 Socket
Tool I/F	1	1	1
Vibration Motor	1	1	1
Emergency Switch	1NC/1NO	1NC/1NO	1NC/1NO
Enable Switch	3-mode 2NO	3-mode 2NO	3-mode 2NO
D-out	2 Points	2 Points	2 Points
Operation Output	1 Point	1 Point	1 Point
Buzzer Output	1 Point	1 Point	1 Point

### "BUILT-IN" SAFETY FEATURES

#### Vibration Alerts

With most hand-held units, there is a chance that you might overlook an alarm indication when you are watching a machine or the line. An internal motor in the GP2000H makes sure this won't happen by vibrating to alert you to alarms and warnings.




#### 3-Position Enable Switch

The GP2000H unit's 3-position "dead-man" enable switch with dual circuit is designed with safety in mind and operates only when it is lightly pressed and held. If it is tightly pressed, the contacts are opened.



#### 3-Contact Emergency Switch

This switch boosts the level of safety in the event of an emergency. Two contacts of this switch's use a forced-break mechanism to physically break the circuit. To protect against dual-circuit damage, the third contact can be used to trigger an inversion circuit.

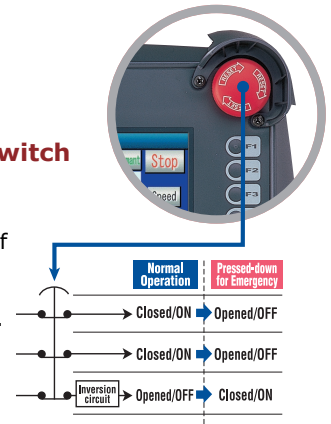

# GP2x01H SERIES SPECIFICATIONS

## FUNCTIONAL SPECIFICATIONS

Models		GP2301H-LG41-24V	GP2301H-SC41-24V	GP2401H-TC41-24V
Display	Type	5.7" Monochrome LCD	5.7" STN Color LCD	6.5" TFT Color LCD
	Colors	Black and white	64-colors	256 colors
	Backlight	CCFL (service life: 50,000 hrs. at 25°C and 24 hr. operation)		
	Resolution	320 x 240 pixels		640 x 480 pixels
	Effective Display Area	(W)115.2mm [4.54in.] x (H)86.4mm [3.4in.]		(W)132.5mm [5.21in.] x (H)99.4mm [3.91in.]
	Brightness Control	4 levels of adjustment available via touch panel		
Memory	Application	1 MB FLASH EPROM		2 MB FLASH EPROM
	Data Backup	128 KB SRAM - Uses lithium battery		
Interfaces	Serial (COM 1) Interface	Asynchronous: RS-232C/RS-422, Data Transmission Speed: 2400 to 115.2 kbps, Data Length: 7 or 8 bits, Parity: None, Odd or Even		
	Tool Connector	Asynchronous TTL non-procedural command I/F		
	Memory Card Interface	1 socket (CompactFlash™)		


## GENERAL SPECIFICATIONS

Electrical	Input Voltage	DC 19.2V to DC 28.8V	
	Power Consumption	15W or less	
Environmental	Ambient Operating Temp.	0°C to 40°C	
	Storage Temperature	-20°C to 60°C	
	Storage Humidity	10%RH to 90%RH (non-condensing, wetbulb temp.: 39°C or less)	
	Vibration Resistance	When vibration is NOT continuous: 10Hz to 57Hz 0.075mm, 57Hz to 150Hz 9.8m/s <sup>2</sup> When vibration is continuous: 10Hz to 57Hz 0.035mm, 57Hz to 150Hz 4.9m/s <sup>2</sup> ; X, Y, Z directions for 10 times (80min.)	
	Ratings	Equivalent to IP65f (JEM 1030) <sup>a</sup> NEMA#250 TYPE4X/12	
Structural	Agency Certifications	EN55011 class A, EN61000-6-2, UL60950, CAN / CSA-C22.2 No.60950-00	
	External Dimensions	W253 [9.96] x H185 [7.28] x D58 [2.28] mm [in.] (excluding projections) <sup>b</sup>	
	Weight	1.2kg [2.65lb]	

<sup>a</sup> The degree of protection provided by these products is equivalent to IP65f, however their performance cannot be guaranteed for every environment. Be sure to confirm your work environment requirements prior to installation.


<sup>b</sup> Does not include CF Card interface guard or emergency stop switch guard.

## EXTERNAL DIMENSIONS

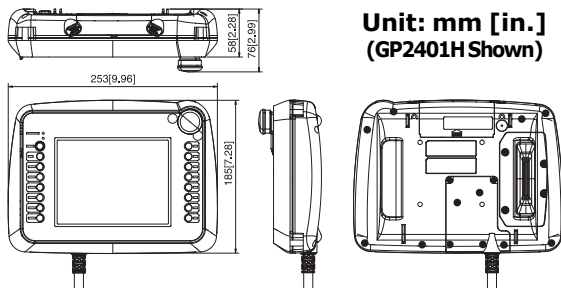

Unit: mm [in.]  
(GP2401H Shown)

## ADAPTERS

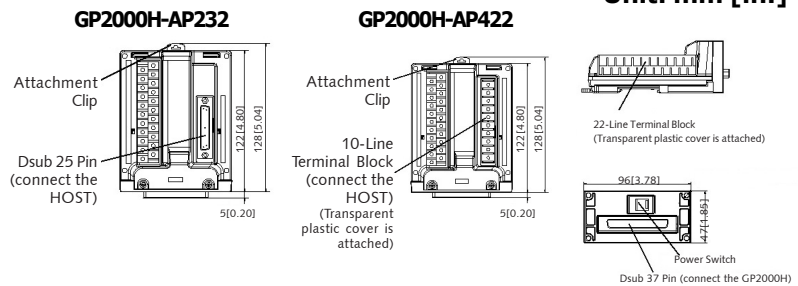

Unit: mm [in.]

## ORDERING INFORMATION

ORDER NUMBER	DESCRIPTION
GP2301H-LG41-24V	5.7" Monochrome LCD, CompactFlash Socket, 1 MB Memory, 24VDC, UL, CE
GP2301H-SC41-24V	5.7" STN Color LCD, CompactFlash Socket, 1 MB Memory, 24VDC, UL, CE
GP2401H-TC41-24V	6.5" TFT Color LCD, CompactFlash Socket, 2 MB Memory, 24VDC, UL, CE

### OPTIONAL ACCESSORIES

GP2000H-D232-3M	RS-232 Cable, 3M, D-Sub connector, connects handheld
GP2000H-AP232	RS-232 breakout adaptor for use GP2000H - D232-xx cables
GP2000H-D422-3M	RS-422 cable, 3m, D-sub connector, connects handheld to GP2000H-AP232
GP2000H-AP422	RS-422 Breakout adaptor for use GP2000H-D422-xx cables
GPW-CB02	Programming cable: PC RS-232 9-pin D-sub application download cable
GPW-CB03	Programming cable: PC USB, application download cable
GP2000H-DF10	Protective Hard Type Sheet for 5.7", 6.2" (5 per pack)

**Xycom Automation, Inc.**  
a Pro-face America Company  
734-429-4971  
Fax: 734-429-1010  
<http://www.xycom.com>

**Customer Support Hotline:**  
**734-944-0482**



© 2005 Xycom Automation, Inc. Is a wholly owned subsidiary of Pro-face America, Inc. Specifications may change without notice. Xycom Automation is a trademark of Xycom Automation. Other brand or product names are the property of their respective owners.



# California Proposition 65 Warning—Lead and Lead Compounds

## Advertencia de la Proposición 65 de California—Plomo y compuestos de plomo

## Avertissement concernant la Proposition 65 de Californie—Plomb et composés de plomb

**⚠ WARNING:** This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**⚠ ADVERTENCIA:** Este producto puede exponerle a químicos incluyendo plomo y compuestos de plomo, que es (son) conocido(s) por el Estado de California como causante(s) de cáncer y defectos de nacimiento u otros daños reproductivos. Para mayor información, visite : [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**⚠ AVERTISSEMENT:** Ce produit peut vous exposer à des agents chimiques, y compris plomb et composés de plomb, identifiés par l'État de Californie comme pouvant causer le cancer et des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter: [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

**Schneider Electric USA, Inc.**  
800 Federal Street  
Andover, MA 01810 USA  
888-778-2733  
[www.schneider-electric.us](http://www.schneider-electric.us)

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:  
**Schneider Electric México, S.A. de C.V.**  
Av. Ejercito Nacional No. 904  
Col. Palmas, Polanco 11560 México, D.F.  
55-5804-5000  
[www.schneider-electric.com.mx](http://www.schneider-electric.com.mx)

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

**Schneider Electric Canada, Inc.**  
5985 McLaughlin Road  
Mississauga, ON L5R 1B8 Canada  
800-565-6699  
[www.schneider-electric.ca](http://www.schneider-electric.ca)