



GP270 Series Monochrome & STN Color HMI

4.7" Operator Interface with RS-232/RS-422 serial port connectivity

The **GP270 series** of touch screen operator interface HMI unit includes one RS232/RS422 serial communication port for direct connection to PLC's, temperature controllers, inverters, and other various serial devices. The program download tool port doubles as a bar code reader input during runtime operation. Optional Communication modules for communication DH+, Remote I/O and Modbus Slave are also supported. These units are compatible with Pro-face's full-featured GP-PRO 03 HMI development software.

GP270-LG31-24VP (monochrome)
GP270-SC31-24V (STN color)



This unit is ideal for basic graphical HMI applications such as monitoring environmental chambers, tank levels, machine on/off status, part tracking, system event monitoring, heat treating, etc. Interface to your custom controller using GP-Pro 03 scripting language and write your own simple ASCII protocol.

FEATURES

- 4.7-Inch touch screen
- 320 x 240 resolution
- NEMA 4x/12 Rated
- UL, cUL Recognized Certifications
- RS-232/422 Com Port Configurable
- Supports Optional Comm. Modules
- Bar Code Reader Support
- Multi-Language Support
- 0 to 50°C Rated

INFORMATION

Powerful secure data collection and sharing




Various HMI software solutions available to match your needs:

- Advanced featured Graphics Editor for drawing objects, animation, creating pre-configured operator objects, scripting, etc.
- Recipes Trending, Data Logging, Alarm Event/Management, Security, etc.
- Multi-level security password features
- Graphic file import: BMP, JPEG, EMF, PNG
- Time-scheduler for production shift monitoring

COMMUNICATION

Versatile interfaces support flexible and expanding control system needs:

- **Connect to various controllers via serial port or optional communications modules**

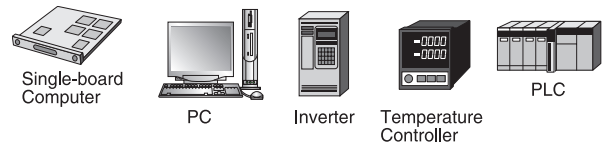

- **Also supports serial devices; such as single or two-dimensional bar code readers.**



CONNECTIVITY: LARGEST SELECTION OF PROTOCOLS AVAILABLE!

Popular Controllers Supported:

<p>Schneider Twido Quantum Momentum Micro & Nano 984/884</p> <p>Toshiba V Series Prosec EX, T Provisor</p> <p>Yokogawa FA, FCN, FCJ UT Series</p> <p>Omron Symac Series</p>	<p>Rockwell SLC500 PLC-5 Control Logix MicroLogix Compact Logix FR Inverters</p> <p>Mitsubishi MELSEC-A MELSEC-FX MELSEC-Q MELSEC-QNA</p> <p>Koyo Kostac DL205, 305, 405 DL05 Series</p>	<p>GE Fanuc Series 90-30 Series 90-70 PowerMate (Motion Controller) Fanuc Series 16, 18, 16i, 18i, 21i</p> <p>Fuji Electric Panadac 7000 Micrex-F Flex-PC Temperature controllers</p> <p>Siemens Simatic-S5 Simatic-S7-200, 300, 400 Simatic-505</p> <p>Toyoda Toyopuc PC2/3</p>	<p>Profibus Modbus Plus Interbus S Data Highway Plus CanOpen Remote I/O DeviceNet Modbus RTU DH485</p> <p>... and MORE</p>
--	--	--	---

GP270 SERIES SPECIFICATIONS


FUNCTIONAL SPECIFICATIONS

Models		GP270-LG31-24VP	GP270-SC31-24V
Display	Type	4.7" Monochrome LCD	4.7" STN LCD
	Colors	Black and white	8-colors (white, red, blue, green, yellow, purple, light blue, bk)
	Backlight	User-replaceable CCFL (under normal temperatures and humidity, lifespan = 20,000 hrs.)	
	Resolution	320 x 240 pixels	
	Effective Display Area	(W)96mm [3.78in.] x (H)72mm [2.83in.]	
Memory	Brightness Control	8 levels of adjustment available via touch panel	
	Application	256 KB FLASH EPROM	
Interfaces	Serial (COM 1) Interface	Asynchronous: RS-232C/RS-422, Data Transmission Speed: 2400 to 38400 bps, Data Length: 7 or 8 bits, Parity: None, Odd or Even	
	Tool Connector	RS-232C Asynchronous Transmission Method, TTL level, non-procedure command interface (during screen development) used for downloading application screens (during RUN mode) used as Bar-code Reader interface	

GENERAL SPECIFICATIONS

Electrical	Input Voltage	DC 20.4V to DC 27.6V
	Power Consumption	12W or less (TYP 8W)
Environmental	Ambient Operating Temp.	0°C to 50°C
	Storage Temperature	-20°C to 60°C
	Storage Humidity	20%RH to 85%RH (non-condensing)
	Vibration Resistance	10Hz to 25Hz (X, Y, Z directions for 30 minutes 2G)
Ratings	(For front panel of installed unit) Equivalent to IP65f (limited to front panel)	
Structural	Agency Certifications	CE, UL, cUL listed CL 1 Div 2 UL508, UL1604
	External Dimensions	W172mm[6.77in.] x H127mm [4.99in.] x D58mm [2.28in.] (GP main unit only)
	Weight	0.8kg (2.1lb) or less (main unit only)

EXTERNAL DIMENSIONS

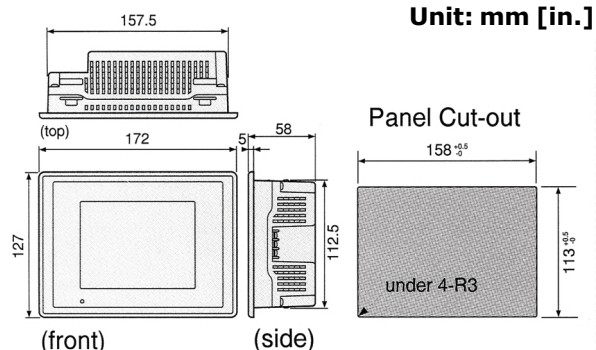

OPTIONAL COMM. MODULES

QPJ-ABD-201	Data Highway Plus comm. module
QPJ-ABR-201	Remote I/O comm. module
QPJ-MBP-XA1	Modbus Plus comm. module

ORDERING INFORMATION

ORDER NUMBER	DESCRIPTION
GP270-LG31-24VP	4.7" Monochrome LCD, RS-232/RS-422 Serial port, 24VDC, UL1950
GP270-SC31-24V	4.7" STN Color LCD, RS-232/RS-422 Serial port, 24VDC, UL1950

OPTIONAL ACCESSORIES

GPW-CB02	Programming cable: PC RS-232, 9 pin D-sub application download cable
GPW-CB03	Programming cable: PC USB, application download cable
GP270-DF10-O	Overlay screen protection sheet (Qty 10)

Xycom Automation, Inc.
a Pro-face America Company
734-429-4971
Fax: 734-429-1010
<http://www.xycom.com>

Customer Support Hotline:
734-944-0482



© 2005 Xycom Automation, Inc. Is a wholly owned subsidiary of Pro-face America, Inc. Specifications may change without notice. Xycom Automation is a trademark of Xycom Automation. Other brand or product names are the property of their respective owners.



California Proposition 65 Warning—Lead and Lead Compounds

Advertencia de la Proposición 65 de California—Plomo y compuestos de plomo

Avertissement concernant la Proposition 65 de Californie—Plomb et composés de plomb

⚠ WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov.

⚠ ADVERTENCIA: Este producto puede exponerle a químicos incluyendo plomo y compuestos de plomo, que es (son) conocido(s) por el Estado de California como causante(s) de cáncer y defectos de nacimiento u otros daños reproductivos. Para mayor información, visite : www.P65Warnings.ca.gov.

⚠ AVERTISSEMENT: Ce produit peut vous exposer à des agents chimiques, y compris plomb et composés de plomb, identifiés par l'État de Californie comme pouvant causer le cancer et des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter: www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca