

5.7" Operator Interface Plus Control



TouchPanel Operation



5.7-inch STN Color Stand Alone Graphic Controller

LT-3300

Model: LT3300-S1-D24-K, LT3300-S1-D24-C
LT3300-L1-D24-K, LT3300-L1-D24-C

DC 24V	5.7-inch
QVGA	

All-in-one model Built-in DIO Expansion I/O

Powered by

Screen Editor




Features:

- 5.7-inch (QVGA 320x240) Stand Alone Graphic Controller
- Ladder logic for simple machine control
- Built-in 16 discrete inputs, 16 outputs and up to 3 EXM modules
- All-in-one operator interface plus control solution reduces wiring, system cost, maintenance cost and space.
- Ethernet port for data management
- Serial port to communicate to temperature controllers.

Specifications

Model	LT3300-S1-D24-K LT3300-S1-D24-C	LT3300-L1-D24-K LT3300-L1-D24-C
Graphics Display Resolution	QVGA (320 x 240 dots)	
Display Type and Size	STN Color LCD (5.7 inch)	Monochrome B/W LCD (5.7-inch)
Display Colors	4, 096 Colors	16 shades
Display Area	117.2mm[4.61in.] x 88.4mm[3.48in.]	
Touch Screen	Resistive Film (Analog) Touch Screen	
DIO	Input	16 discrete points sink/source-type 24VDC. Reconfigurable as High Speed counters (up to 4 single phase 100Kpps or 2 double phase 50Kpps), Pulse Catch
	Output	16 discrete points sink-type 24VDC. Reconfigurable as pulse output or PWM (up to 65KHz per point)
USB	USB1.1 Host I/F x 1, USB TYPE-A connector	
Serial	COM1: RS232C/RS4322/RS485 Asynchronous Transmission/Data Length: 7 bit/8 bit Parity: none, Odd or Even Stop Bit: 1bit/2bit. Data transmission: Speed: 2400bps Connector: DSUB-9pin plug	
Ethernet	IEEE802.3u, 10BASE-T/100BASE-TX	
I/O Expansion	Mix and Match any three EXM Modules	
Input Voltage/Rated Voltage Range	24V DC/ 19.2V DC to 28.8V DC	
Power Consumption	27W (max.)	
Temperature	Operating 0°C (32°F) to 50°C(122°F), Storage -20°C (-4°F) to +60°C (140°F)	
Altitude Operation	800hPa to 1114hPa (2000 meters above sea-level and below)	
Certifications	UL508, ANS/ISA-12.12,01-2007, CSA-22.2 No. 142-M1987, CSA-22.2 No.213-M1987, CE marking EN55011, EN61000-6-2. Suitable for use in Class I, Division 2, Groups A, B, C, and D. Hazardous locations or non hazardous locations.	
Humidity - Ambient/Storage	10 to 90% RH (Not condensing, wet bulb temperature: 29°C or less).	
Corrosive Gas	Free of corrosive gases	
Vibration & Shock Resistance	IEC61131-2 compliant 5 to 9Hz single-amplitude 3.5mm 9 to 150Hz constant-accelerated velocity 9.8m/s2 X, Y, Z directions for 10 cycle (100 minute)	
Rating	Equivalent to IP65f NEMA #250 TYPE 4X/13. (front surface when panel is embedded)	
Weight	Approx. 1.0kg [2.2lb] max. (unit only)	
External Dimensions	167.4mm [6.59in.] x 135mm [5.31in.] x 77.6mm [3.07in.]	
Warranty	Two (2) years	

I/O EXPANSION MODULES



Mix and Match Any Three Modules

See EXM Module Datasheet for a full list of I/O expansion modules.

Input I/O modules

- EXM-DDI8DT** 8-point sink/source shared I/O Unit, DC24V input signal can be connected
- EXM-DDI16DT** 16-point sink/source shared I/O Unit, DC24V input signal can be connected

Output I/O modules

- EXM-DRA8RT** 8-point relay output with 2 commons I/O Unit
- EXM-DRA16RT** 16-point relay output with 2 commons I/O Unit
- EXM-DDO8UT** 8-point transistor output sink I/O Unit
- EXM-DDO16UK** 16-point transistor output sink I/O Unit
- EXM-DDO8T** 8-point transistor output source I/O Unit
- EXM-DDO16TK** 16-point transistor output source type I/O unit


Input / Output Mixed I/O modules

- EXM-DMM8DRT** 4-point input sink-source, 4-point relay output with single common
- EXM-DMM24DRF** 16-point Inputs / 8-point Relay Output Module

Analog I/O modules

- EXM-AMI2HT** 2-point analog input type
- EXM-ALM3LT** 2-point temperature input / 1-point analog type
- EXM-AMM3HT** 2-point analog input / 1-point analog output type
- EXM-AMO1HT** 1-point analog output type
- EXM-AMI4LT** 4-ch analog /temperature input (12bit, 0-10V, 0-20mA, Pt100/Pt1000, Ni100/Ni1000) Screw Terminals
- EXM-ARI8LT** 8-ch Temperature input unit (10 bit, Pt100/Pt1000, Ni100/Ni1000) Screw Terminals
- EXM-AVO2HT** 2-ch analog output (10bit, -10 to 10V) Screw Terminals
- EXM-AMM6HT** 4-point Analog Input/ 2-point Analog Output Module

LT3300 - External Dimensions

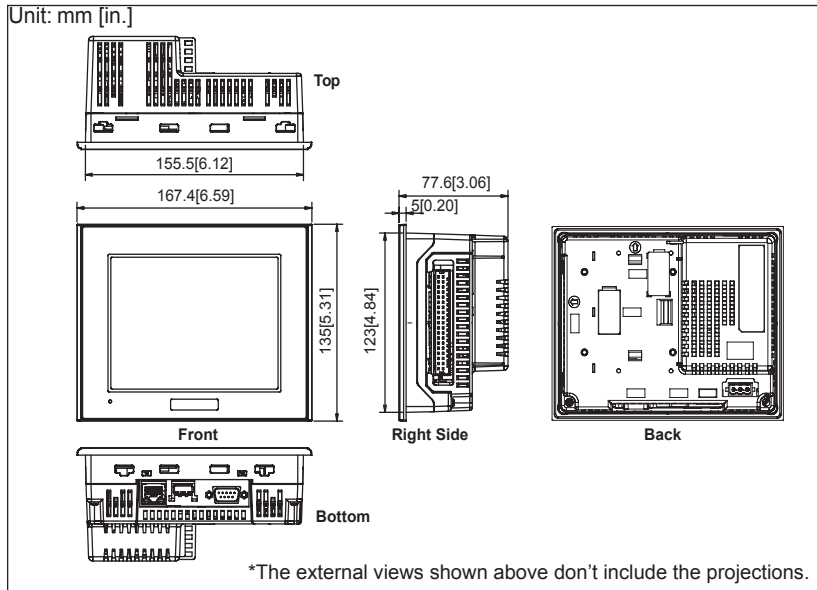

Ordering Information

Part Number	Description
LT3300-S1-D24-K	5.7" STN Color LCD, HMI plus Control with Discrete I/O (Sink)
LT3300-S1-D24-C	5.7" STN Color LCD, HMI plus Control with Discrete I/O (Source)
LT3300-L1-D24-K	5.7" Monochrome B/W LCD, HMI plus Control with Discrete I/O (Sink)
LT3300-L1-D24-C	5.7" Monochrome B/W LCD, HMI plus Control with Discrete I/O (Source)

Optional Items


Product Name	Part Number
Software (GP-Pro EX)	EX-ED-V2.1 or later
I/O Expansion	See EX Module data sheet for list of available modules
USB Transfer Cable (1m)	CA3-USBCB-01
USB Front Cable (1m)	CA5-USBEXT-01
Screen Protection Sheet (5 sheets/set)	CA3-DFS6-01

Caution: Before operating any of these products, please be sure to read all related manuals thoroughly.

- All product names used in this document are trademarks or registered trademarks of their respective companies.
- All information contained in this document is subject to change without notice.

LT3300 - Cut-Out Dimensions

Unit: mm [in.]

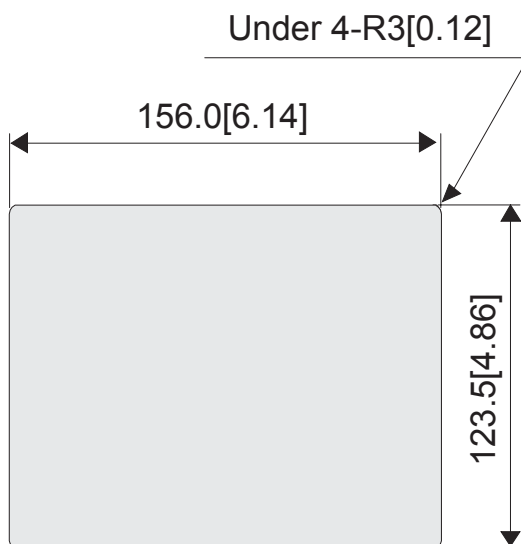

Pro-face America
 Phone: 734.477.0600
 Fax: 734.864.7347
www.profaceamerica.com

Customer Service Hotline: 800.298.9266

For more information

ACCESS

www.profaceamerica.com



California Proposition 65 Warning—Lead and Lead Compounds

Advertencia de la Proposición 65 de California—Plomo y compuestos de plomo

Avertissement concernant la Proposition 65 de Californie—Plomb et composés de plomb

⚠ WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov.

⚠ ADVERTENCIA: Este producto puede exponerle a químicos incluyendo plomo y compuestos de plomo, que es (son) conocido(s) por el Estado de California como causante(s) de cáncer y defectos de nacimiento u otros daños reproductivos. Para mayor información, visite : www.P65Warnings.ca.gov.

⚠ AVERTISSEMENT: Ce produit peut vous exposer à des agents chimiques, y compris plomb et composés de plomb, identifiés par l'État de Californie comme pouvant causer le cancer et des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter: www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca