


15" Panel Computer - PS3710A-T42-24V Series (DC Model)



TouchPanel Operation



8 GB or 2 GB Bootable CompactFlash® Card



16-64GB Solid State Drive


15-inch TFT Color LCD Panel Computer

PS-3710A

24VDC
XGA
15-inch

Model: PS3710A-T42 Series

CPU: Intel Pentium M 1.6 GHz



Features:

- 15-inch (XGA 1024x768) TFT Touch Panel Computer
- Intel® Pentium® M 1.6 GHz
- 60GB Hard Drive, 2 or 8GB CF Drive, 16-64 GB SSD (Solid State Drive)
- Windows XP Pro or XP Embedded
- SSD (Solid State Drive) for Reliability and faster data access
- DVD-ROM
- NEMA 4/4x/12 Rated

- Integrated Factory Alert System with Output Port**
- Class I, Div. 2 Hazardous Location
- Open HMI WinGP Option**
- Use PC as On-demand Touch Screen HMI
- Allows 3rd Party Applications to Run Concurrently:
 - SPC, Vision, SCADA, MRP
- Expands PC Hardware and Data Connectivity Options


Performance Specifications

Model	PS3710A-T42 Series - Build to order (See reverse side for ordering information)
Supported OS	Windows® XP Multi-language (XM60, XM16S, XM16SA, XM32SA, XM64SA), Windows® XP Pro* (XPC08) (*This version of XP Pro includes English, French, Spanish, Brazilian Portuguese, Japanese, Simplified and Traditional Chinese Languages), Windows® XP Embedded Multi-language (EM2G)
CPU	Intel® Pentium® M 1.6 GHz
Standard Memory	1 GB SO-DIMM Standard, 2 GB SO-DIMM Optional
Maximum Memory	2 Slots (Max. 2 GB) SO-DIMM socket
Graphics Display Resolution	XGA (1024 x 768 dots)
Video Memory	Max. 64 MB (When using Windows®) UMA Type
Display Type and Size	TFT Color LCD (15 inch)
Display Colors	262,144 Colors
Display Area	W 304.1mm[11.97in.] x H 228.1mm[8.98in.]
Touch Screen	Resistive Film (Analog)
Serial	COM1: RS 232C, D-sub 9 pin (plug) (RI/+5V switchable) COM2: RS 232C, D-sub 9 pin (plug) (RI/+5V switchable) COM3: RS 232C, D-sub 9 pin (plug) (RS-422/RS-485 switchable) COM4: RS 232C, D-sub 9 pin (plug)
LAN	Rear 2 ports. RJ-45 type modular jack connector (8 pins) LAN1: auto change to 10BASE-T/100BASE-TX LAN2: auto change to 10BASE-T/100BASE-TX/1000BASE-T (Support Wake On LAN)
USB	USB 2.0 compatible rear 4 ports, Switchable to Disable by hardware setting, USB 2.0, Front face, 1 port
Sound	Line In, Speaker output, MIC In, rear 3 ports (3.5mm jack x 3)
Disk	IDE I/F, Master: 2.5 inch 60GB HDD. or 16-64GB SSD Slave: CF Card I/F (not hot-swappable). Switchable to Master by hardware setting. DVD-ROM
PCMCIA	Side 2 ports. PCMCIA TypeII/III. Corresponding to cARD BUS (Excluding Video Zoom, SOUND functions)
PCI	Rev.2.2 compatible PCI I/F (5V) 1 Port, Slot Length: Depth 240mm[9.45in.] x Height 106.68mm[4.20in.]
RAS**	D-Sub, 25pin Socket, 1 Port
**1 Factory Alert System is equipped with the built-in RAS interface.	

General Specifications

Model	PS3710A-T42 Series
Input Voltage	24V DC (Rated Voltage 19.2 to 28.8V)
Power Consumption	110W or less
Allowable Voltage Drop	5ms or less
Voltage Endurance	AC1000V 20mA for 1 minute (between charging and FG terminals)
Insulation Resistance	DC500V 10MΩ(min.) (between charging and FG terminals)
Certifications	UL508, CSA-C22.2 No.142-M1987, ANSI/ISA-12.12.01-2007 (Class I, Division 2, Groups A, B, C, D Hazardous Locations), CSA-C22.2 No.213-M1987 (Class I, Division 2, Groups A, B, C, D Hazardous Locations), CE (EN55011 Class A, EN61000-6-2), RoHS
Temperature	0 to 50°C (32 to 122°F) without HDD; 5 to 50°C (41 to 122°F) with HDD
Humidity - Ambient/Storage	10 to 90% RH (Not condensing, wet bulb temperature: 29°C (84.2°F) or less). Storage Temperature -20 to +60°C (-4 to 140°F)
Corrosive Gas	Free of corrosive gases
Noise Immunity	Noise Voltage: 1500Vp-p, Pulse Duration: 50ns, 500ns, 1µs Rise Time: 1ns (via noise simulator)
Cooling Method	Forced Air Cooling by Fan
Electrostatic Discharge Immunity	6kV (complies with EN 61000-4-2 Level 3)
Vibration Resistance	IEC61131-2 compliant: Without HDD - 5 to 9Hz half-amplitude 3.5mm, 9 to 150Hz constant-accelerated velocity 9.8m/s². X,Y,Z directions for 10 cycle (100 minute) With HDD - 4.9m/s² (10 to 25Hz X, Y, Z directions for 30 minute)
Shock During Operation	EN/IEC 60068-2-27 compliant, 147m/Sec, 11msec (Approx. 15G), 3 shocks to 3 direction/ axis
Rating	Equivalent to IP65f NEMA #250 TYPE 4/4X/12.
Weight	Approx. 8.0kg [17.6lb] max. (unit only)
External Dimensions	395mm [15.55in.] W x 294mm [11.57in.] H x 100mm [3.94in.] D
Warranty	Two (2) year

PS-3710A - External Dimensions - Global Version

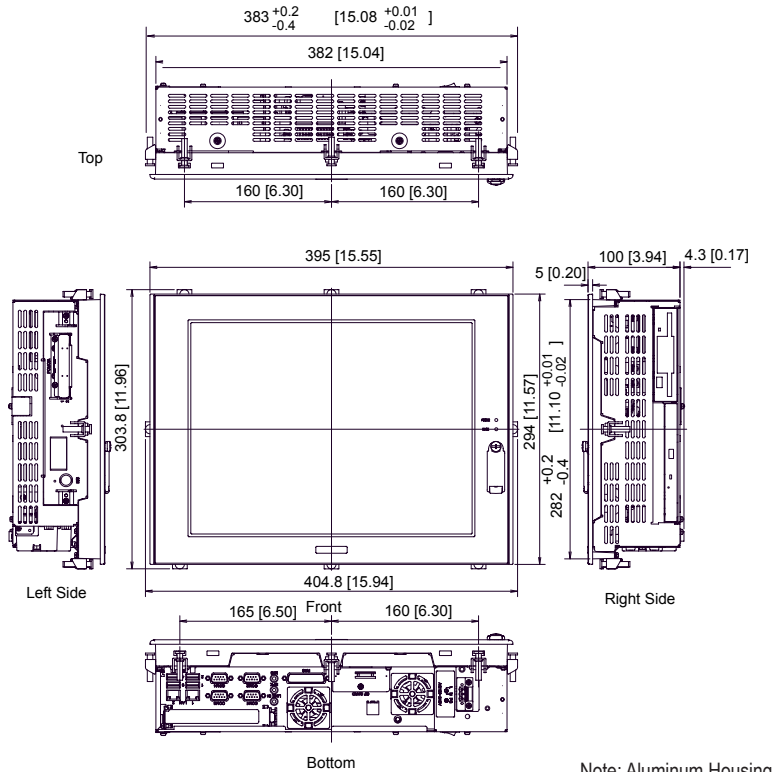

Ordering Information

PS3710A-T42-24V - - -

Memory:

1G.....1 GB

2G.....2 GB

Operating System:

XM60....60 GB HDD w/ XP ML

EM2G...2 GB CF w/ XP ML

XPC08..8 GB CF w/ XP Pro*

XM16S....16GB SSDw/XP ML

XM16SA..16GB SSDw/XP ML

XM32SA..32GB SSDw/XP ML

XM64SA..64GB SSDw/XP ML

Secondary Storage:

Blank.....No Secondary Storage

NO60.....60GB HDD

NO16SA..16GB SSD

NO32SA..32GB SSD

Open HMI:

Blank.....No HMI Software Included

WG.....WinGP Installed

* The languages included with this version of Windows XP Pro are English, French, Spanish, Brazilian Portuguese, Japanese, Simplified and Traditional Chinese.

Optional Items

Product Name	Part Number	
SO-DIMM Memory Module	1 GB	PSA-DDR1G
HDD Unit *2	60 GB	PS371XA-HD60P
CF Card*2	512MB	CA3-CFCALL/512MB-0
	1GB	CA6-CFCALL/1GB-01
	2GB	CA8-CFCALL/2GB-01
	8 GB	144766
Installation Gasket *1	CA3-WPG15-01	
Installation Fasteners *1	CA3-ATFALL-01	
Backlight (2 pieces/set for 1 unit)	CA7-BLU15-01	
DC Power Connector *1	CA7-DCCNL-01	
Screen Protection Sheet (5 sheets/set)	CA3-DFS15-01	

*1 Standard attachment for all models.


*2 Not installed with operating system.

Caution: Before operating any of these products, please be sure to read all related manuals thoroughly.

- All product names used in this document are trademarks or registered trademarks of their respective companies.

- All information contained in this document is subject to change without notice.

PS-3710A - Cut-Out Dimensions - Global Version

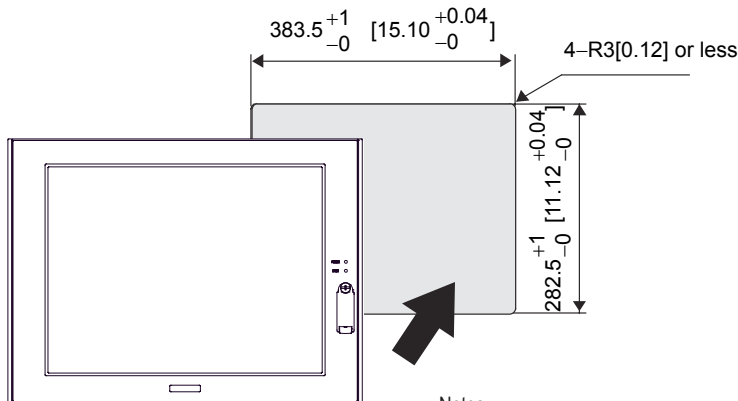

Pro-face America
Phone: 734.477.0600
Fax: 734.864.7347
www.profaceamerica.com

Customer Service Hotline: 800.289.9266

For more information

ACCESS

www.profaceamerica.com

Pro-face
for the best interface



California Proposition 65 Warning—Lead and Lead Compounds

Advertencia de la Proposición 65 de California—Plomo y compuestos de plomo

Avertissement concernant la Proposition 65 de Californie—Plomb et composés de plomb

⚠ WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov.

⚠ ADVERTENCIA: Este producto puede exponerle a químicos incluyendo plomo y compuestos de plomo, que es (son) conocido(s) por el Estado de California como causante(s) de cáncer y defectos de nacimiento u otros daños reproductivos. Para mayor información, visite : www.P65Warnings.ca.gov.

⚠ AVERTISSEMENT: Ce produit peut vous exposer à des agents chimiques, y compris plomb et composés de plomb, identifiés par l'État de Californie comme pouvant causer le cancer et des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter: www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca