

15" Panel Computer - PS3711A-T42 Series

Fanless

Open HMI Option: WinGP

TouchPanel Operation



8 GB or 2 GB Bootable CompactFlash® Card



16-64GB Solid State Drive

15-inch TFT Color LCD Panel Computer

PS-3711A

Model: PS3711-T42 Series,
CPU: Intel® ULV Celeron® M 1.0 GHz

AC100/240V

24VDC

XGA

15-inch

All-in-one model

Windows® XP

Factory Alert System

Windows® XP Embedded

SSD

WinGP

CF Card






Features:

- 15-inch (XGA 1024x768) TFT Touch Panel Computer
- Intel® ULV Celeron® M 1.0 GHz
- 60GB Hard Drive, 2 or 8GB CF Drive, 16-64GB SSD (Solid State Drive)
- Windows XP Pro or Windows XP Embedded
- Fanless Design
- NEMA 4/4x/12 Rated
- RoHS Directive-conforming
- Integrated Factory Alert System with Output Port*1
- SSD (Solid State Drive) for reliability and faster data access
- Class I, Div. 2 Hazardous Location
- On-demand HMI WinGP Option**
- Use PC as On-demand Touch Screen HMI
- Allows 3rd Party Applications to Run Concurrently:
 - SPC, Vision, SCADA, MRP
- Expands PC Hardware and Data Connectivity Options

Performance Specifications



Models	PS3711A-T42 Series - Build to order (See reverse side for ordering information)
Supported OS	Windows® XP Multi-language (XM60, XM16S, XM16SA, XM32SA, XM64SA), Windows® XP Pro* (XPC08) (*This version of XP Pro includes English, French, Spanish, Brazilian Portuguese, Japanese, Simplified and Traditional Chinese Languages), Windows® XP Embedded Multi-language (EM2G)
CPU	Intel® ULV Celeron® M 1.0 GHz
Standard Memory	512 MB SO-DIMM Standard, 1 GB SO-DIMM Optional
Maximum Memory	1 Slots (Max. 1 GB) SO-DIMM socket (PC2700)
Display Resolution	XGA (1024 x 768 dots)
Video Memory	Max. 64 MB (When using Windows®) UMA Type
Display Type and Size	TFT Color LCD (15 inch)
Display Colors	262,144 Colors
Display Area	W 304.1mm[11.97in.] x H 228.1mm[8.98in.]
Touch Screen	Resistive Film (Analog)
Serial	COM1: RS 232C, D-sub 9 pin (plug) (RI/+5V switchable) COM2: RS 232C, D-sub 9 pin (plug) (422 / 485 switchable)
LAN	Rear 2 ports. RJ-45 type modular jack connector (8 pins) LAN1: auto change to 10BASE-T/100BASE-TX LAN2: auto change to 10BASE-T/100BASE-TX/1000BASE-T (Supports Wake-On LAN)
USB	USB 2.0 compatible, 4 rear ports, 1 front port; Switchable to Disable by hardware setting
Sound	Speaker output, (Mini-pin jack x 1)
Disk	IDE I/F, Master: 2.5 inch 60GB HDD, or 16-64GB SSD Slave: CF Card I/F (not hot-swappable). Switchable to Master by hardware setting.
PCMCIA	Side 2 ports. PCMCIA Type II, Type III. Corresponding to CARD BUS (Excluding Video Zoom, SOUND functions)
RAS*1	D-Sub, 25-Pin Socket 1 port

*1 Factory Alert System is equipped with the built-in RAS interface.


General Specifications

Models	PS3711A-T42 Series (AC Models)	PS3711A-T42-24V Series (DC Models)
Input Voltage	AC100 / 240V (Rated Voltage AC85 to 264V)	24V DC (Rated Voltage 19.2 to 28.8V)
Power Consumption	70VA or less	90W or less
Allowable Voltage Drop	1 cycle or less (Voltage drop interval must be 1s or more.)	5ms or less
Voltage Endurance	AC1500V 20mA for 1 minute (between charging and FG terminals)	AC1000V 20mA for 1 minute (between charging and FG terminals)
Insulation Resistance	DC500V 10MQ(min.) (between charging and FG terminals)	
Certifications	UL508, CSA-C22.2 No.142-M1987, ANSI/ISA-12.12.01-2007 (Class I, Division 2, Groups A, B, C, D Hazardous Locations), CSA-C22.2 No.213-M1987 (Class I, Division 2, Groups A, B, C, D Hazardous Locations), CE (EN55011 Class A, EN61000-6-2, EN60950-1(AC Model Only)), RoHS	
Temperature Ambient/Storage	0 to 50°C (32 to 122°F) without HDD; 5 to 45°C (41 to 113°F) with HDD / Storage Temperature -20 to +60°C (-4 to 140°F)	
Humidity - Ambient/Storage	10 to 90% RH (Not condensing, wet bulb temperature: 29°C (84.2°F) or less). / Storage Humidity 10 to 90% RH (Not condensing, wet bulb temperature: 39°C (102.2°F) or less).	
Corrosive Gas	Free of corrosive gases	
Noise Immunity	Noise Voltage: 1500Vp-p, Pulse Duration: 50ns, 500ns, 1µs Rise Time: 1ns (via noise simulator)	Noise Voltage: 1000Vp-p, Pulse Duration: 50ns, 500ns, 1µs Rise Time: 1ns (via noise simulator)
Cooling Method	Natural Air Cooling by Heat Sink	
Electrostatic Discharge Immunity	6kV (complies with EN 61000-4-2 Level 3)	
Vibration Resistance	Without HDD - IEC61131-2 compliant, 5 to 9Hz single-amplitude 3.5mm, 9 to 150Hz constant-accelerated velocity 9.8m/s². X,Y,Z directions for 10 cycle (100 minute) With HDD - 10 to 25 Hz Single amplitude: 0.075 mm (0.003in) 57 to 150 Hz Fixed acceleration: 4.9m/s². X, Y, Z directions 10 cycles (for 30 minutes)	
Rating	Equivalent to IP65f NEMA #250 TYPE 4/4X/12.	
Weight	Approx. 6.0kg [13.2lb] max. (unit only)	
External Dimensions	395mm [15.55in.] W x 294mm [11.57in.] H x 60mm [2.36in.] D	
Warranty	Two (2) year	

PS3711A-T42 Dimensions and Cutout

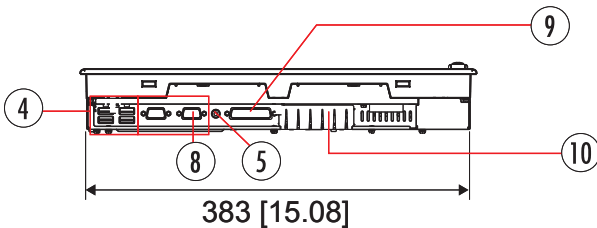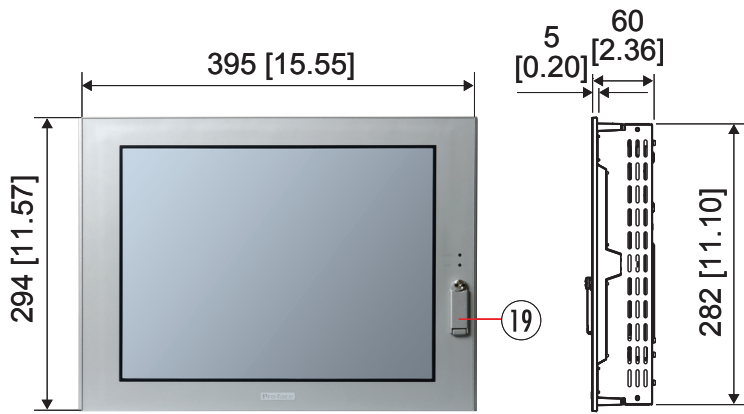

Panel Cut-Out Dimensions

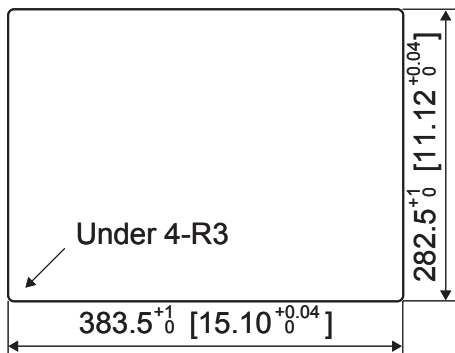

Allowable Panel Thickness: 1.6 to 10.0

Ordering Information

PS3711A-T42-

Power Supply: _____
Blank.....AC
24V.....DC

Memory: _____
5M.....512 MB
1G.....1 GB

Operating System: _____
XM60.....60 GB HDD w/ XP ML
EM2G.....2 GB CF w/ XP ML
XPC08.....8 GB CF w/ XP Pro*
XM16S.....16GB SSDw/XP ML
XM16SA..16GB SSDw/XP ML
XM32SA..32GB SSDw/XP ML
XM64SA..64GB SSDw/XP ML

Secondary Storage: _____
Blank.....No Secondary Storage
NO60.....60GB HDD
NO16SA..16GB SSD
NO32SA..32GB SSD

Open HMI: _____
Blank....No HMI Software Included
WG.....WinGP Installed

* The languages included with this version of Windows XP Pro are English, French, Spanish, Brazilian Portuguese, Japanese, Simplified and Traditional Chinese.

Optional Items

Product Name		Part Number
SO-DIMM Memory Module	512 MB	PSA-DDR512
	1 GB	PSA-DDR1G
HDD Unit *2	60 GB	PS371XA-HD60P
CF Card*2	512MB	CA3-CFCALL/512MB-0
	1GB	CA6-CFCALL/1GB-01
	2GB	CA8-CFCALL/2GB-01
	8 GB	144766
CF Card PCMCIA Adapter		GP077-CFADIO
Desktop Stand *3		CA4-STD15-01
Unit Cover		CA4-CVR15-01
Power Supply Unit*4		CA4-PWU15-01
Installation Fasteners *1		CA3-ATFALL-01
AC Power Connector *1		CA7-ACCNL-01
DC Power Connector *1		CA5-DCCNL-01
Screen Protection Sheet (5 sheets/set)		CA3-DFS15-01

*1 Standard attachment for all models.
*2 Not installed with operating system.
*3 Use in conjunction with unit cover.
*4 Does not support safety standard.

Caution: Before operating any of these products, please be sure to read all related manuals thoroughly.
- All product names used in this document are trademarks or registered trademarks of their respective companies.
- All information contained in this document is subject to change without notice.

Pro-face America
Phone: 734.429.4971
Fax: 734.429.1010
www.profaceamerica.com

Customer Service Hotline: 734.944.0482

For more information
ACCESS www.profaceamerica.com

Pro-face
Your HMI and Industrial PC Authority



California Proposition 65 Warning—Lead and Lead Compounds

Advertencia de la Proposición 65 de California—Plomo y compuestos de plomo

Avertissement concernant la Proposition 65 de Californie—Plomb et composés de plomb

⚠ WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov.

⚠ ADVERTENCIA: Este producto puede exponerle a químicos incluyendo plomo y compuestos de plomo, que es (son) conocido(s) por el Estado de California como causante(s) de cáncer y defectos de nacimiento u otros daños reproductivos. Para mayor información, visite : www.P65Warnings.ca.gov.

⚠ AVERTISSEMENT: Ce produit peut vous exposer à des agents chimiques, y compris plomb et composés de plomb, identifiés par l'État de Californie comme pouvant causer le cancer et des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter: www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca